


PSU-SM


Selectable Current Power Supply Unit
with Battery Backup, Current Limit, Low Voltage Disconnect,
Mains & Dynamic Battery Monitoring

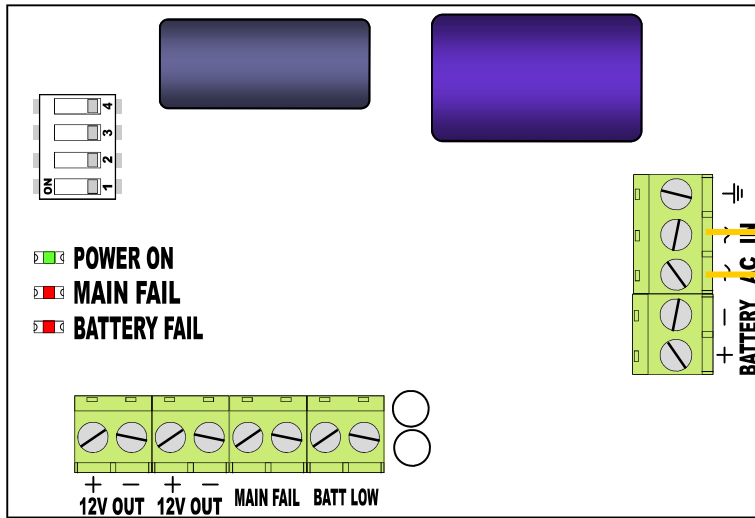

NO or NC Clean Contacts
30VDC 100mA Max.

Each Outlet is protected by a 1.5Amp PTC self resetting fuse.


Power Source Option A.
17VAC 1.4A Transformer
Dipswitch 1 OFF
(1.5A Max. Output)



BOX ASS
PLAS CABINET



Power Source Option B.
24VDC 2.2A min. Adapter
Dipswitch 1 ON
(3A Max. Output)

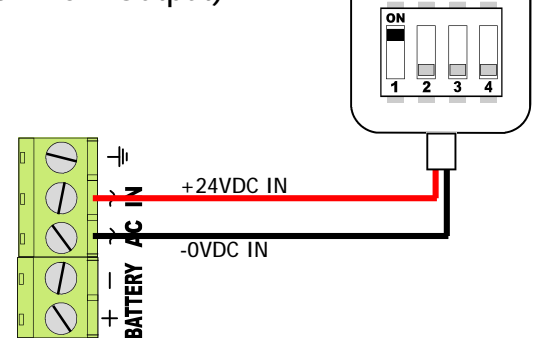

Dipswitch	Option	
1	Off	1.5 Amp Current Limit (calibrated for 16VAC 1.5A Adapter)
	On	3.0 Amp Current Limit (calibrated for 24VDC 2.2A Adapter)
2	Off	250mA Max. Battery charge Current (Recommended Battery 1.3Ah to 7.5Ah)
	On	500mA Max. Battery charge Current (Recommended Battery 7Ah to 18Ah)
3	Off	Instant Mains Fail
	On	15 minute Delay on Main Fail
4	Off	Mains & battery output are Fail Safe (NC)
	On	Mains & battery output are Fail Secure (NO)

ARROWHEAD ALARM PRODUCTS Ltd.

344b Rosedale Rd,
Albany,
Auckland.
Ph. 09 414 0085
Fax. 09 414 0088
www.aap.co.nz
v1.1



Arrowhead Alarm Products Ltd