

ISSUE 15 CATALOGUE

ARROWHEAD ALARM PRODUCTS

344b Rosedale rd, Albany, Auckland, NZ
ph. 09-414-0085 fax. 09-414-0088

www.aap.co.nz



Arrowhead Alarm Products was established in 1986 with a philosophy to provide top quality security equipment with an emphasis on expert back up and support.

The Elite Security System is designed and manufactured in our purpose built facility located in Albany industrial park.

On site we have a specialised team of software and hardware engineers complimented by our lead free high speed pick and place manufacturing plant and multi stage quality control system.

Each and every product we manufacture is tested in house and this start to finish process control makes us so confident that we put a 5 year warranty on everything we build.

Exclusive technical support library on line and factory trained engineers providing unprecedented levels of technical partnership.

Having this technical knowledge in house gives us the ability to service products fast.

Which is a huge plus for our imported product line, No delays with gear needing to be sent off shore to find whether there is a fault or not.

pop in and see us any time and meet the team.



QR CODES

Use your smartphone to quickly access technical details and manuals on a huge range of AAP products.

Download a QR app, from your app store.









SECTION-1	ALARM KITS	1	
SECTION-2	ALARM PANELS	2	
SECTION-3	ALARM KEYPADS	3	
SECTION-4	ALARM PANEL ACCESSORIES	4	
SECTION-5	PIEZO, STROBE AND SIRENS	5	
SECTION-6	INDOOR DETECTION DEVICES	6	
SECTION-7	OUTDOOR DETECTION	7	
SECTION-8	GLASSBREAK/SEISMIC DETECTORS	8	
SECTION-9	N-9 MICROWAVE DETECTORS		
SECTION-10	N-10 REED SWITCHES		
SECTION-11	SECTION-11 WIRELESS DETECTORS		
SECTION-12	CTION-12 PENDANTS/TRANSMITTERS		
SECTION-13	SECTION-13 RADIO RECEIVERS AND DECODERS		
SECTION-14	SECTION-14 ELSEMA WIRELESS		
SECTION-15	ION-15 MONITORING AND CELLULAR		
SECTION-16	MEDICAL & EMERGENCY		
SECTION-17	ACCESS CONTROL & INTERCOMS	17	
SECTION-18	GATE AUTOMATION	18	
SECTION-19	19 FIRE ACCESSORIES		
SECTION-20	BATTERIES		
SECTION-21	CABLE		
SECTION-22	ION-22 CONTROL, RELAYS AND TIMERS		
SECTION-23	LENSES AND BRACKETS		
SECTION-24	PLASTIC ENCLOSURES		
SECTION-25	PLUG PACKS		
SECTION-26	POWER SUPPLIES 12VDC	26	
SECTION-27	POWER SUPPLIES 24VAC	27	
SECTION-28	POWER SUPPLIES 24VDC	28	
SECTION-29	TOOLS		
SECTION-30 CCTV			





ESL KIT-1

Full Alarm Kit Pre-Programmed comes with: E16LED KP +ALL KIT ITEMS LISTED ABOVE







ESL KIT-2 comes with:









ESL KIT-3

Full Alarm Kit Pre-Programmed comes with: ELITE S LCDKP +ALL KIT ITEMS LISTED ABOVE







ESL KIT-4

Full Alarm Kit Pre-Programmed comes with: KP-LCD-ST7OEM +ALL KIT ITEMS LISTED ABOVE







ESL KIT-6

Full Alarm Kit Pre-Programmed comes with: KP-ICON +ALL KIT ITEMS LISTED ABOVE







ESL KIT-7









ESL KIT-8

Full Alarm Kit Pre-Programmed comes with: KP-ICON-OEM-P +ALL KIT ITEMS LISTED ABOVE





ESL TRX KIT

-ELITE S LITE CONTROL PANEL CABINET WITH TRANSFORMER

-TRX KEYPAD
-2 TRX PIR's
-2TRX PENDANT's
-TRX EXTERNAL
-TRX TRANSCEIVER

-3A/H 12VOLT SLA BATTERY -PS209R INTERNAL SIREN

SEE BELOW FOR YOUR CHOICE OF POWER SOURCE FOR PANEL AND KEYPAD



ESL TRX KIT-A1

Full Wirelless Alarm Kit Powered by 230V Mains Transformer Keypad Runs off In-wall 230V PSU







ESL TRX KIT-A2

Full Wirelless Alarm Kit
Powered by 300mA Plug Pack Keypad
Runs off In-wall 230V PSU





ESL TRX KIT-C1

Full Wirelless Alarm Kit
Powered by 230V Mains Transformer
Keypad Runs off Rechargeable Back
Plate Li-Ion Smart battery supplied with
Plug-Pack Charger





ESL TRX KIT-C2

Full Wirelless Alarm Kit
Powered by 300mA Plug Pack Keypad
Runs off Rechargeable Back Plate Li-Ion
Smart battery supplied with Plug-Pack
Charger





When hardwired to an Elite S series control panel this board will allow all these 2-way wireless products to control and be controlled by the panel.

Full 2-way wireless LCD ICON display keypad updated from panel in real time. Run up to 8 keypads on the system. With 230V in-wall mains PSU and 2 x CR2450 Battery Backup

Full 2-way wireless LCD ICON display keypad updated from panel in real time. Run up to 8 keypads on the system. With Rechargeable back plate Li-Ion smart battery and plug pack

2-way wireless external siren strobe unit. Runs up to 3 years on a single C size lithium battery. Flash lamp or chirp siren for arm & disarm indication. Fully supervised. 104dB.

2-way wireless internal sounder. Up to 3 years on a single C size lithium battery. Fully supervised, provide door chime from wireless call point or full alarm tones at 104dB.

Battery powered 2-way wireless relay output, takes commands from the Elite S to operate 2 doors or gates via key code, zone inputs, time zone or hand held transmitter.

Low current 2-way wireless Swan quad element PIR detector fully supervised. 25Kg Pet friendly.

2-way wireless reed switch for securing doors and windows. Indicates open or closed status to the control panel. Hard wired input

2-Way Wireless Heat Detector 85Db Builtin Sounder and Compliant Hush Button, 57Deg. Trigger temp.

Photo electric 2-way wireless VST smoke detector, built in 85dB sounder and Compliant Hush Button

Hand held 4 button 2-way wireless transmitter for arming disarming and output control. *Battery=1 x CR2032*

2 x 4 Button TRX remotes and a TRX TRANSCIEVER







LITE PANEL

INCLUDES:
-ELITE S LITE CONTROL PANEL
S CABINET WITH TRANSFORMER
-RESISTOR PACK







comes with: E16LED KP +ALL ITEMS LISTED ABOVE







comes with: KP-LED-OEM ST +ALL ITEMS LISTED ABOVE







comes with: ELITE S LCDKP +ALL ITEMS LISTED ABOVE







comes with: KP-LCD-ST70EM +ALL ITEMS LISTED ABOVE







comes with: KP-ICON +ALL ITEMS LISTED ABOVE







comes with: KP-ICON-OEM +ALL ITEMS LISTED ABOVE







comes with: KP-ICON-OEM-P +ALL ITEMS LISTED ABOVE














ELITE S LITE MANUFACTURED PCB Zones: 4 normal EOL, 8 Zone Doubling Outputs: 4 open collector all customisable Onboard Dialer and 1 Amp PSU







COMPLETE ELITE S PANEL IN METAL CABINET WITH TAMPER KIT (NO KEYPAD) (310x260x75)







COMPLETE ELITE S IN PLASTIC CABINET WITH TAMPER KIT (NO KEYPAD)







ELITE S PANEL MANUFACTURED PCB Zones: 8 normal EOL, 16 Zone Doubling Outputs: 4 open collector, 1 Relay all customisable Onboard Dialer and 1 Amp PSU



3 - ALARM KEYPADS





GREEN LED KEYPAD

Compatible with: Elite-S, Elite-S lite, Elite 16D v6, Elite 8D (137 x 124 x 28)







Icon LCD keypad with time and temp display

Compatible with: Elite-S, Elite-S lite (137

x 124 x 28)







LED KEYPAD, OEM STYLE

Compatible with: Elite-S, Elite-S lite,

Elite 16D v6, Elite 8D

(134 x 88 x 24)







Icon LCD keypad with time and temp display OEM STYLE Features Zone Input

Compatible with: Elite-S & Elite-S lite

(134 x 88 x 24)







Icon LCD blue backlite keypad with built-in Prox reader for easy arm/disarm with tags Features Zone Input Compatible with: Elite-S & Elite-S lite (134 x 88 x 24)

*For indoor use only







BLUE LED KEYPAD

Compatible with: Elite-S, Elite-S lite, Elite 16D v6, Elite 8D

x 124 x 28)







FULL LCD KEYPAD BLUE BACKLIT, Programmable zones names example: Zone 1 Garage Door Open, Compatible with: Elite-S, Elite-S lite (137

x 125 x 29)







LCD KEYPAD (for Older Gen. Elite's) Programmable zones names example: Zone 1 Garage Door Open, Compatible with: Elite-64, Elite 16D v6, Elite 8D & AC-2 (137 x 125 x 29)





KP-LCD-ST70EM

FULL LCD KEYPAD OEM STYLE Programmable zones names example: Zone 1 Garage Door Open, Compatible with: Elite-S, Elite-S lite (134 x 88 x 24)





Full 2-way wireless LCD ICON display keypad updated from panel in real time. Run up to 8 keypads on the system. With 230V in-wall mains PSU and 2 x CR2450 Battery Backup







Full 2-way wireless LCD ICON display keypad updated from panel in real time. Run up to 8 keypads on the system. With Rechargeable back plate Li-Ion smart battery and plug pack







PW READER

OUTDOOR ACCESS PROX READER WITH OUT KEYS
Compatible with: Elite-S, Elite-S lite & AC-2 (121 x 46 x 21)







PW READER 2

OUTDOOR ACCESS PROX READER WITH 2-BUTTONS
Compatible with: Elite-S, Elite-S lite & AC-2 (121 x 46 x 21)







PW READER-AAPNZ

OUTDOOR ACCESS PROX READER WITH FULL KEYPAD Compatible with: Elite-S, Elite-S lite & AC-2 (121 x 46 x 21)







ACRYLIC PLATE

SMALL ACRYLIC PLATE FOR PW READER 10MM LASER CUT BLK For use when mounting a PW-Reader on a Metal Surfaces





NIGHT ARMING STATION With Ready and Arm Status LED Compatible with: Elite-S, Elite-S lite, Elite 16D v6, Elite 8D & Elite-64 (117 x 76 x 28)



4 - ALARM PANEL ACCESSORIES



When hardwired to an Elite S series control panel this board will allow all these 2-way wireless products to control and be controlled by the panel.







2 x 4 Button TRX remotes and a TRX TRANSCIEVER







Battery powered 2-way wireless relay output, takes commands from the Elite S to operate 2 doors or gates via key code, zone inputs, time zone or hand held transmitter.







4 X RELAY OUTPUT EXPANDER COMPATIBLE WITH ALL ELITE SYSTEMS & RX-OCTA (102 x 59 x 18)







Universal LAN to PSTN reporting module for monitoring over internet







Elite S to IP-Module connection cables, for IP control (setup requires advanced IT knowledge) allows access and control of Elite -S series panel via web browser.







Record upto 240 second of audio, that can be played over the Dialler when performing domestic reporting.

Compatible with: Elite-S, Elite-S lite, Elite 16D v6, Elite 8D & Elite 64 (85 x 48 x 15)







PROGRAMMER FOR VOICE BD STD Use this tool to record custom messages into the Voice board







Great Combo Deal kit includes: 1 x Voice BD STD and 1 x Speech Prog/AU







BUS CONTROLLED MULTI FREQUENCY 303, 433 & 915MHz RECEIVER (101 x 65 x 18)









Dual Wiegand Interface for Elite S, SX Systems, 12VDC reqired, featuring 2 inputs & 2 outputs. Optional 2 Amp Plug in PSU available (ESX-PSU2)





DSL008 2+ ADSL

High Quantity ADSL 2+ Line Filter A must if High Speed internet is present on phone line connected to Alarm panel (65 x 40 x 22)





2G-IP-MODULE

GSM Universal PSTN to DATA Communicator for IP-Monitoring. For Vodafone and 2Degrees networks. Can be setup for personal monitoring sends TXT & Email. (uses low cost data) Programming through LAN port using webrowser No software required.







3G Universal PSTN to DATA Communicator for IP-Monitoring. Get all of the features of the 2G-IP-MODULE plus will work on Telecoms 3G network aswell.





WT1020

WT1020 GSM Cellular Unit Ideal for sites without fixed telephone lines, standard cellphone calling rates apply (not for phone line back-up use) (Vodafone or 2 Degree's only)







CS-47NZ

CS47 Cellular Back up Unit - Telepermit approved product. For dual path reporting incase of line fail, standard cellphone calling rates apply (Vodafone or 2 Degree's only)







12-24V AC/DC ADJUSTABLE LIGHT LEVEL CONTROL BOARD FOR LDR WITH BUILT IN TIMER OPTION (86 x 71 x 25)



- ALARM PANEL ACCESSORIES





LDR IN A PDL PLATE FOR LUX for indoor use (116 x 75 x 20)







LDR IN AN IP65 BOX FOR LUX (65 x 60 x 40)



ELITE BOX

METAL ELITE CABINET WITH LID (310 x 260 x 75)





FLUSH KIT FOR ELITE BOX





ASSEMBLED BOX, LID, MAINS TRANSFORMER, FUSED TERMINAL BLOCK (310 x 260 x 75)



SCC-18

18' STRUCTURED CABLING CABINET (FLUSH MOUNT) 457 x 362 x 100mm





SCC-18 LID

Optional LID FOR 18' STRUCTURED CABLING CABINET (for Surface Mount Conversion)



SCC-28

28' STRUCTURED CABLING CABINET (FLUSH MOUNT) 711 x 362 100mm





UNIVERSAL GEAR PLATE FOR STRUCTURED CABLING CABINET Inclueds Rivets and Standoffs compatible with: Elite S, IP-Module's, TRX-Transeiver, SP-Relay's, Fusebd8, (162 x 106 x 23mm)







SCC-TRANS-1

Plate Mounted 230V to 17VAC 1.4Amp Transformer and fuse T/Block for Structured Cabling Cabinet







SCC-TRANS-2

2 Plate Mounted 230V to 17VAC 1.4Amp (2.8Amps total) Transformers and fuse T/Block







ELITE RESISTOR TAMPER KIT for Metal Cabinet



CRSHPW002

CROW PW-4/8 PLASTIC BOX (295 X 257 X 85)



PLAS CABINET

PRE ASSEMBLED PLASTIC BOX WITH MAINS TRANSFORMER &TERMINAL BLOCK (295 X 257 X 85)





P KIT Tamper Kit for Plastic Cabinet



ELITE TRANS

1.4A TRANSFORMER 17VAC



WARNING STICKR

RED/WHITE WARNING STICKER OUTDOOR







SIREN HI POWERED 120dB A weighted 12Volt 1.2Amp



5 - PIEZO, STROBES AND SIRENS

SPL-50

12V RED LED STROBE & 80dB SIREN 70mm dia.



SPL-50B

12V BLUE LED STROBE & 80dB SIREN 70mm dia.

RED LAMP ASS

Red Lamp Assembly (Comes with

13.8VDC Constant Input required for

charging

screws & Gasket)

5 - PIEZO, STROBES AND SIRENS

6 - INDOOR DETECTION DEVICES



SWAN QUAD

Quad Element Pet Fiendly PIR, upto 25Kg Rated, 2.1meter opt. Mounting height, wide angle lense, detection range 18meters, mounting bracket availible



D

SWAN QUAD N/O

Quad element pet friendly PIR with Normally Open Contacts, Ideal for use with Car Alarms



IR80

SIEMENS 12Kg PET PIR IR80B, 2.2meter opt. Mounting height, detection range 12meters







GENIUS 10

GENIUS DUAL PIR outdoor sensor with NO & NC contacts Perfect for harsh environments, 2.1meter opt. Mounting height, detection range 15.3meters





PDM-I12

MIRROR OPTIC 20KG PET PIR, 2.2meter opt. Mounting height, detection range 12meters



Ø.

SWAN 1000S

SWAN 1000 MICROWAVE/PIR 9.9GHz, upto 25Kg Pet Proof, 2.1meter opt. Mounting height



SWAN 1000X

SWAN 1000 microwave / PIR 10.525GHz, upto 25Kg Pet Proof, 2.1meter opt. Mounting height





ANTIMASKING PET PIR & MICROWAVE DETECTOR for high security applications



QUIP-2000





SWAN

SWAN PGB

PET PIR 25Kg Pet immunity with built in SHOCK/GLASS BREAK DETECTOR 8.2-16VDC







CRTL360

TALON 360 DEG PIR max. height 3.6meters max. coverage diamiter 20meters

7 - OUTDOOR DETECTION



CRDDOO

DOUBLE AND DUAL O/D PIR 7.8-16VDC 15meter max.coverage, 2.1meter opt. Mounting height





EDS-2000 DUO

QUAD PIR AND MICROWAVE OUTDOOR SENSOR, NO & NC Contacts, selectable Pet immunity 20-35Kg, detector range 18meters





LINEAR

DEA 12/24VAC/DC SURFACE MOUNT POINT TO POINT BEAM





LINEAR B

DEA 12-24vAC/DC SURFACE MOUNT POINT TO POINT BEAM easy fix model the IR TX unit is battery powered upto 20m IP54





104LUX

DEA ADJUSTABLE SURFACE MOUNT POINT TO POINT BEAM upto 20m 12-24V AC/DC IP54





CAB-60T

CROW 60MTR(OUTDOOR) TWIN BEAM POINT TO POINT SET 12-24VDC





'- OUTDOOR DETECTION



CAB-150T

CROW 150MTR (OUTDOOR) TWIN BEAM, 12-24VDC





JN-DCA-20

SOLAR POWERED Point to Point 20M Infrared Photobeam, Solar Powered, Wireless (433MHz) Often used with RX-CHIME for gate entry alert inside the house transmitts upto 500mtrs line of sight





JN-DCA-50

SOLAR POWERED

Point to Point 50M Infrared Photobeam, Solar Powered, Wireless (433MHz)



JN-DCA-200

SOLAR POWERED

Point to Point 200M Infrared Photobeam, Solar Powered, Wireless (433MHz)





JN-P01

SOLAR BOOST POWER SOURCE FOR JN-DCA SERIES OF BEAMS



JN-RL-S

Solar Repeater for JN DC Beams 433MHz



MD2010

LOOP METAL DETECTOR 12-24VDC or 16-24VAC, Delivers precise vehicle detection when accompanied with an in-ground loop under the driveway, allowing you to operate your gate automation system by simply exiting your premises in your vehicle no remote or keypad required



A-PROBE KIT

Kit Includes: 1 x A-Probe, 1 x A-Controller, 1 x A-Cable-30




A-PROBE

AAP Ground Probe requires A-**CONTROLLER + A-CABLE**



A-CABLE-30

30 Meter Cable and Socket for A-**PROBE**



30 Meter Extention Cable for A-PROBE with Plug & Socket



CONTROL GROUND PROBE 6-31VAC 8-46VDC, is an excellent vehicle detection device due to it's ease of installation. Simply bury this unit beside the exit driveway to have automatic gate operation when exiting in your vehicle



8 - GLASSBREAK/SEISMIC DETECTORS



CRGB TESTER

GLASS BREAK TESTER









GLASSBREAK / VIBRATION DETECTOR 9-16VDC, detection range 10meters





GM730

GM730 Seismic Detector (Direct Replacement for GM530) ideal for mounting on safes





GMXP0

(277 273) Mounting Plate for GM31/35/36



SWAN PGB

PET PIR 25Kg Pet immunity with built in SHOCK/GLASS BREAK DETECTOR 8.2-16VDC







Vibration Analyzer, Requires 1 or more VIB100 Sensors





VIB100

Nessensor Vibration Sensor. Compatible with NSP1 & Elite panel range



8 - GLASSBREAK/SEISMIC DETECTORS



VIB-2000

Shock / Vibration Sensor 10-16V

9 - MICROWAVE DETECTORS



× A

SWAN 1000S

SWAN 1000 MICROWAVE/PIR 9.9GHz, upto 25Kg Pet Proof, 2.1meter opt. Mounting height







SWAN 1000X

SWAN 1000 microwave / PIR 10.525GHz, upto 25Kg Pet Proof, 2.1meter opt. Mounting height







QUIP-2000

ANTIMASKING PET PIR & MICROWAVE DETECTOR for high security applications







EDS-2000 DUO

QUAD PIR AND MICROWAVE OUTDOOR SENSOR, NO & NC Contacts, selectable Pet immunity 20-35Kg, detector range 18meters







SRX360 X

X 10.525GHZ DUAL TECH 360 DEGREE PIR / MW DETECTOR, upto 3.6m mounting height, 20m dia. Coverage when at 3.6m



10 - REED SWITCHES


IN - KEED SWITCHES					
	S	132WH	SURFACE REED SW-SPDT-WHITE 130VDC 50mA max 19mm Gap Self adhesive or screw		
		142SP	FLUSH REED SW-SPST 130VDC 50mA 12mm Gap		
		220SP	STEEL DOOR CONTACT NC 130VDC 50mA 37mm Gap Dia.25mm		
	and a	39RSP-WH	STND SURF CC CONTACT-WHITE 130VDC 50mA 25mm Gap		
		41SP-WH	SURF.CONTACT SPDT-WHITE 130VDC 50mA 30mm Gap		
	10	90SP	MINI-SURFACE REED SW 130VDC 50mA 15mm Gap		
		B-127	TAMPER SWITCH WHITE FOR PANEL		
	A S	BP-30	SURFACE MOUNT REED SWITCH Self 130VDC 50mA 19mm Gap adhesive or screw		
		BP-33	HEAVY DUTY REED SWITCH 130VDC 50mA 57mm Gap		
HES		BP-50	FLUSH MOUNT REED SWITCH 130VDC 50mA 12mm Gap		
		400SP	Surface Mount Reed Switch 130VDC 50mA 50mm Gap		
		PP	29" X 15 " PRESSURE PAD, Great for sticking under boat mats (736mm x 381mm)		
10 - REED SWITCHES	0	SP-3000A	Reed Switch Wide Gap Mini OHD Contact 2.25" Gap Adjustable Magnet, ideal for garage doors		

11 - WIRELESS DETECTORS





11 - WIRELESS DETECTORS



FW-MAG9F

FREEWAVE 915MHZ RADIO REED SWITCH, also features a hard wired

input for external devices, e.g. door bell, panic button, heavy duty reed switch.



JN-DCA-20

SOLAR POWERED

Point to Point 20M Infrared Photobeam, Solar Powered, Wireless (433MHz) Often used with RX-CHIME for gate entry alert inside the house transmitts upto 500mtrs line of sight





JN-DCA-50

SOLAR POWERED

Point to Point 50M Infrared Photobeam, Solar Powered, Wireless (433MHz)





JN-DCA-200

SOLAR POWERED

Point to Point 200M Infrared Photobeam, Solar Powered, Wireless (433MHz)





JN-P01

SOLAR BOOST POWER SOURCE FOR JN-DCA SERIES OF BEAMS





TRX SMOKE

Photo electric 2-way wireless VST smoke detector, built in 85dB sounder and Compliant Hush Button





SUPERVISED 916.5Mhz, 9v Battery Operated Wireless Smoke Detector, Built in 85dB sounder (Supervised freewave Protocol)





VST-S588H-W

303Mhz, 9v Battery Operated Wireless Smoke Detector, Built in 85dB sounder (ness protocol)





433Mhz, 9v Battery Operated Wireless Smoke Detector





2-Way Wireless Heat Detector 85Db Built-in Sounder and Compliant Hush Button, 57Deg. Trigger temp.





VST-HEAT-303

Thermal Rate of Rise Wireless Heat Detector 303Mhz, 57Deg. Trigger temp. with hush button





Thermal Rate of Rise Wireless Heat Detector 915Mhz, 57Deg. Trigger temp. with hush button



12 - PENDANTS/TRANSMITTERS



TRX PENDANT

Hand held 4 button 2-way wireless transmitter for arming disarming and output control. Battery=1 x CR2032







2 x 4 Button TRX remotes and a TRX **TRANSCIEVER**





RM-8003A

4 button black & chrome Remote 303Mhz (no cover) Batterys=3 x CR2016



RM-8003B

4 button black & chrome Remote 915Mhz (no cover) Batterys=3 x CR2016





RM-8003A KIT

2 x 4 Button 303Mhz remotes (no cover) and a RX-16 MF349 (101 x)65 x 18)



RM-8003B KIT

2 x 4 Button 915Mhz remotes (no cover) and a RX-16 MF349 (101 x)65 x 18)



RM-8006A

4 button black & chrome Remote 303Mhz (with slider) Batterys=3 x CR2016



RM-8006B

4 button black & chrome Remote 915Mhz (with slider) Batterys=3 x CR2016



RM-8006A KIT

2 x 4 Button 303Mhz remotes and a RX-16 MF349 (101 x 65 x 18)

RM-8006B KIT

2 x 4 Button 915Mhz remotes and a RX-16 MF349 (101 x 65 x 18)





RM-0001A

4 button black and chrome Remote 433Mhz Battery=1 x A27



RM-0001A KIT

 2×4 Button 433Mhz remotes and a RX-16 MF349



SX-TR04

303MHZ 4CH BLACK REMOTE PENDANT (CAN BE CODED ALIKE) Battery=1 x A27



SX-TR04/433

433MHZ 4CH BLUE SATIN FINISH PENDANT (CAN BE CODED ALIKE) Battery=1 x A27



CODING


Coding SX-TR04 remotes alike





FW-RMTB9F

FREEWAVE BLACK REMOTE 915MHZ

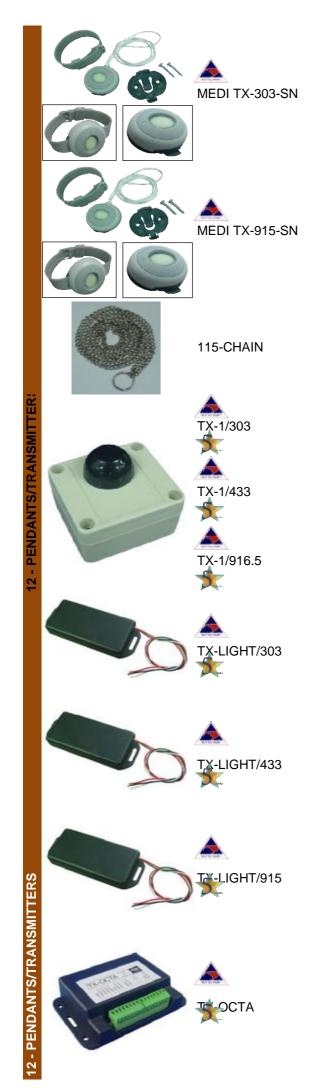

Water Proof Medical Transmitter in 303 Mhz, Comes as a kit with the options of either being used as an around the neck pendant, a Wrist Watch style or screwed to the wall on its clip base. (SN protocol)

Water Proof Medical Transmitter in 915 Mhz, Comes as a kit with the options of either being used as an around the neck pendant, a Wrist Watch style or screwed to the wall on its clip base. (SN protocol)

115 SILVER NECK CHAIN & KEY RING

single button 303Mhz transmitter in IP65 box, with battery

single button 433Mhz transmitter in IP65 box, with battery

single button 916.5Mhz transmitter in IP65 box, with battery

single channel 5-15 volt 303Mhz transmitter encased in plastic box with wire tales, apply power to transmit

single channel 5-15 volt 433Mhz transmitter encased in plastic box with wire tales, apply power to transmit

single channel 5-15 volt 915Mhz transmitter encased in plastic box , 3 Wire model, 2 modes Continuous or momentary transmission

8 CHANNEL 915Mhz, FIXED TRANSMITTED IN BOX (118 x 78 x 31) can send multiple transmissions simultaneously, works with RX-OCTA Receiver









13 - RADIO RECEIVERS AND DECODERS





1-Channel Standalone Multi Frequency(303, 433 & 915MHz) Receiver 12-24V AC/DC, 20 radio slots Toggle or Momentery (101 x 65 x 18)







2-Channel Standalone Multi Frequency(303, 433 & 915MHz) Receiver 12-24V AC/DC, 20 radio slots Toggle or Momentery (101 x 65 x 18)







BUS CONTROLLED MULTI FREQUENCY 303, 433 & 915MHz RECEIVER (101 x 65 x 18)







When hardwired to an Elite S series control panel this board will allow all these 2-way wireless products to control and be controlled by the panel.





ABS BOX

(CA1008)ABS RECEIVER BOX





1-Channel Standalone FW/MERLIN Decoder Receiver(303, 433 & 915MHz) Ideal for adding Wireless PIR/Reeds/Smokes to non AAP systems, batt low and tamper outputs, 12-24V AC/DC (101 x 65 x 18)







4-Channel DECODER, 12VDC only, requires Bus Controlled Receiver(RX-16 series) 1 radio slot per channel, works with: Freewave, Ness and RM remote Protocols.







Standalone Boxed Receiver with internal peizo sounder (external sounders can be added with 3.5mm PLUG) NZ mains plug pack included





DESSPK

COMPACT DOOR CHIME SOUNDER PLUS 10MTR CABLE (plug and play ready for RX-CHIME)





2-Channel Standalone Receiver For RX-OCTA only. 915MHz, 12-24V AC/DC (101 x 65 x 18) only works with TX-OCTA


ELSEMA Wireless Range

Long Distance Transmitters and Receivers Check the Link for the complete range available on demand www.aap.co.nz/General+Downloads/Brochures



433MHz GIGALINK TX







2 CHANNEL 433MHZ HAND HELD TRANSMITTER 9-volt battery included



3 CHANNEL 433MHz GIGALINK TRANSMITTER 9-volt battery included



4 CHANNEL HAND HELD TRANSMITTER 9-volt battery included



GLT43308

8 CHANNEL GIGALINK 433MHZ HANDHELD TRANSMITTER 9-volt battery included



GLT4330112E

1 CHANNEL FIXED TRANSMITTER



GLT4330812E

8 CHANNEL FIXED TRANSMITTER

433MHz GIGALINK RX



GLR43301

1 CHANNEL RECEIVER 433MHZ

GLR43301240

1 CHANNEL MAINS RECEIVER 433MH7





2-CHANNEL 433MHZ GIGALINK **RECEIVER**





3 CHANNEL RECEIVER 433MHZ 12-24V



GLR43304

4 CHANNEL RECEIVER 433MHZ

12-24V



GLR43308 12R

8 CHANNEL 433MHZ GIGALINK RECEIVER WITH RELAY OUTPUTS, 12-

24V in Plastic Box

433MHz ANTENNA'S



ANT433S

433Mhz Antenna Standard 35cm Long with Cable and SMA Connector

ANT433M

94CM Long ANTENNA 433 MHZ - With **SMA Connector**

27MHz GIGALINK TX





GIGALINK SINGLE CHANNEL HAND HELD TX WITH BATTERY 9-volt battery

included





GLT2702

ELSEMA GIGALINK 2 CH HAND HELD TX WITH BATTERY 9-volt battery

included



GLT2703

ELSEMA GIGALINK 3 CH HAND HELD TX WITH BATTERY 9-volt battery

included



GIGALINK 27MHZ 4 CHANNEL

TRANSMITTER 9-volt battery included



27MHz 8 CHANNEL HAND HELD GLT2708 TRANSMITTER 9-volt battery included



GLT271208E

27MHz 8 CHANNEL GIGALINK TRANSMITTER WITH METAL CASE

27MHz GIGALINK RX





GLR271240

GL2701240 RECEIVER, 240V, 10A 1CH





4 CHANNEL 12V AC/DC GIGALINK 4 GLR270412

RELAY RECEIVER





GLR2704-24

GLR2704-24V GIGALINK 4 RELAY **RECEIVER**





GLR2708

GIGALINK 8 CHANNEL RECEIVER MODULE LONG RANGE

27MHz STANDARD TX/RX





FMT-401

27Mhz 1ch hand held transmitter High power (90 x 58 x 22)





FMT-402

27mHZ 2 BUTTON HIGH POWERED HAND HELD TX (90 x 58 x 22)





FMT-404

4 CHANNEL HIGH POWERED HAND CONTROLLER (90 x 58 x 22)





FMT-202DA

27M DUAL ACCESS 2 CH TX WITH BATTERY (91 x 58 x 22)





FMT-312E

27mHZ ELSEMA TRANSMITTER IN ALLOY CASE (132 x 61 x 36)





FMR-212T

27Mhz 10-28vAC/DC with timer controlled relay output






FMTR-2713E

12V 27mHZ ELSEMA REPEATER IN BOX (180 x 135 x 75)

27MHz ANTENNA'S

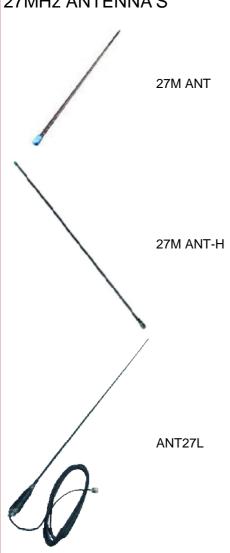

Std antenna assy for L/R TRANS or RX-27

HIGH GAIN 1 METER LONG 27MHZ WHIP ANTENNA

Antenna, 1Mhz 1.8M Long Mounting base and 3M RG58C/U



27M BASE

27M BASE 4MTR RG58CU PL259 PLUG For use with: 27M ANT & 27M ANY-H



27M BASE-ANT

27M ANTENNA BASE (BASE ONLY NO CABLE)



27M-BKT

1.5MM Stainless Steel L Universal Bracket

15 - MONITORING AND CELLULAR



CS47 Cellular Back up Unit - Telepermit approved product. For dual path reporting incase of line fail, standard cellphone calling rates apply (Vodafone or 2 Degree's only)





WT1020

WT1020 GSM Cellular Unit Ideal for sites without fixed telephone lines, standard cellphone calling rates apply (not for phone line back-up use) (Vodafone or 2 Degree's only)







GSM Universal PSTN to DATA Communicator for IP-Monitoring. For Vodafone and 2Degrees networks. Can be setup for personal monitoring sends TXT & Email. (uses low cost data) Programming through LAN port using webrowser No software required.







3G Universal PSTN to DATA Communicator for IP-Monitoring. Get all of the features of the 2G-IP-MODULE plus will work on Telecoms 3G network aswell.





RTU5015

Cellular Gate Opener. This unit can have upto 999 phone numbers loaded into memory, when you call the RTU5015 using caller ID the unit confirms its an authorized number and trigger its output. It also has 2 inputs that can send SMS messages to 2 numbers & a second Output Controlled by Text Message



ONITORING AND CELLULAR




RTI 1150

8 channel SMS sender, 2 relay outputs, built-in battery backup, 12VDC PC Programming Software included. The RTU150 is ideal for plant monitoring, it can have upto 6 numbers loaded



16 - MEDICAL & EMERGENCY



Voice Recording Medical Alarm Dialler, Full Duplex 2 Way Voice, 915Mhz with MEDI TX-915-SN Pre Loaded





Water Proof Medical Transmitter in 303 Mhz, Comes as a kit with the options of either being used as an around the neck pendant, a Wrist Watch style or screwed to the wall on its clip base. (SN protocol)







Water Proof Medical Transmitter in 915 Mhz, Comes as a kit with the options of either being used as an around the neck pendant, a Wrist Watch style or screwed to the wall on its clip base. (SN protocol)





115-CHAIN

115 SILVER NECK CHAIN & KEY RING



業

MEDICO ADSL2 CABLE

ADSL FILTER TELEPHONE CABLE FOR MEDICO



MEDIO PLUGPACK

300MA AC PLUGPACK 15VAC



BT EXTENSION

100MM MALE - FEMALE Telecable EXTENSION



MEDIO TELECABLE

TELEPHONE CABLE FOR MEDICO 510/AP

17 - ACCESS CONTROL & INTERCOMS



CPT-DH16A-12DT

Standalone Outdoor Keypad IP65 Dual Voltage 12-24V, built in Prox Reader, 2 Output's, 1010 User Codes and/or Prox Tags, 2 REX Inputs, Blue Backlight





CPT-DH16A-10T

Standalone Outdoor Keypad IP65 Dual Voltage 12-24V, built in Prox Reader, 2 Output's, 1010 User Codes and/or Prox Tags, 2 REX Inputs, Blue Backlight (120x76x22)





DIGIRAD

Standalone Wireless 433MHz Keypad.
Battery's included 2 x 1.5V-AAA, IP-54, 2-channels with 1 code each, (75 x 112 x 40) requires radio receiver RX-2MF349 works great.







Dual Wiegand Interface for Elite S, SX Systems, 12VDC reqired, featuring 2 inputs & 2 outputs. Optional 2 Amp Plug in PSU available (ESX-PSU2)





CPT-10T-W KIT

Competition Weigand Keypad and Interface Kit





CPT-12DT-W KIT

Competition Architrave Weigand Keypad and Interface Kit





CPT-DH16A-10T-W

40 bit Wiegand 8-18VDC keypad. Blue back lit with built in Prox reader IP65 (requires Wiegand-IF2)






CPT-DH16A-12DT-W

Architrave style 40 bit wiegand keypad. Blue back lit with built in Prox reader IP65 (requires Wiegand-IF2)















Access Control Kit Includes: 1 x AC2 and 1 x PW READER-AAPNZ





PRE-MADE PC SERIAL CABLE FOR AC2 & RS-232 BD





OUTDOOR ACCESS PROX READER WITH OUT KEYS
Compatible with: Elite-S, Elite-S lite & AC-2 (121 x 46 x 21)







OUTDOOR ACCESS PROX READER WITH 2-BUTTONS Compatible with: Elite-S, Elite-S lite & AC-2 (121 x 46 x 21)







OUTDOOR ACCESS PROX READER WITH FULL KEYPAD Compatible with: Elite-S, Elite-S lite & AC-2 (121 x 46 x 21)



- ACCESS CONTROL & INTERCON





SMALL ACRYLIC PLATE FOR PW READER 10MM LASER CUT BLK For use when mounting a PW-Reader on a Metal Surfaces



PROX CARD

PROX CARD compatible with: PW READER range and CPT-DH16A range (86 x 54 x 1mm)



PROX EM4100

TUMBLER PROX KEYTAG GREY compatible with: PW READER range and CPT-DH16A range



PRESCO TAGS

PRESCO PROX KEY TAGS compatible with: PW READER range and CPT-DH16A range



EM4102

20mm CLEAR DISC PROX TAG compatible with: PW READER range and CPT-DH16A range can be fitted in RM-8006 remotes



CS-SK

SILKEY MOUNTED ON KEYTAG



AT1-PCB

AT1 TIMER BOARD, 11 different timer modes, 4 timing ranges, 1 second to 21 hours, 12-24V AC/DC operation, 10A Relay output. (90 x 48 x 20)







AT1 in ABS plastic Box



CPT 595TS

AUDIO ONLY CPT-SAC5T-K2 gate stn & CPT-MT8T-K2 Audio Handset 2 WIRE, SD5T PSU 2-Wire Audio system (4-Wires needed if gate realese is required)



- ACCESS CONTROL & INTERCO



CPT0536SK

Audio only Kit SAC5T-K1 +MT361T-K1 h/free+SD5T (4-wire K1 Villa Series)

CPT-2W-KIT

INCLUDES 1X 6.5" SLIM HANDS FREE MONITOR (CPT-2W-MON)

1X (CPT-2W-GATE) GATE STATION WITH COLOUR CAMERA

1X DIN RAIL 17V 1100MA POWER SUPPLY. THIS IS A TRUE 2 WIRE VIDEO AND AUDIO INTERCOM WITH GATE RELEASE PERFECT FOR REPLACING OLD AUDIO ONLY UNITS.





CPT-2W-MON

SILVER VIDEO AND AUDIO GATE STATION. TRUE 2 WIRE VERSION WITH CONTACTS FOR GATE RELEASE. FOR USE ON CPT-2W-GATE STATION ONLY. MAXIMUM OF 2 MONITORS ON THIS SYSTEM (132 X 95 X 45MM)





CPT KIT A5

Intercom Kit includes: 1 x 6.5" Slim Hands Free Colour Monitor(CPT-MON-5), 1 x Keypad gate station with colour camera(CPT-GATE-A) & 1 x Power Supply.





CPT KIT A6

Kit Includes: 1xMON-6(6.5"monitor), 1xGATE-A(keypad gate station) & 1xPower Supply the Mon-6 has a built-in pager button





COT VIT AS D

KIT INCLUDES 1X (CPT-MON-8B)
PHOTO CAPTURE 7" MONITOR IN
WHITE
1X (CPT- GATE-A) KEYPAD GATE
STATION WITH COLOUR CAMERA
BLUE BACK LIT ACCESS CONTROL,
UP TO 40 USERS
1X SLIM 15V 1.3 AMP SWITCH MODE
POWER SUPPLY (WELL-LPV-20-15)
(CPT-MON-8W)HAS BUILT IN PAGER
BUTTON





CDT KIT A8-W

KIT INCLUDES 1X (CPT-MON-8W) PHOTO CAPTURE 7" MONITOR IN WHITE 1X (CPT- GATE-A) KEYPAD GATE STATION WITH COLOUR CAMERA BLUE BACK LIT ACCESS CONTROL, UP TO 40 USERS 1X SLIM 15V 1.3 AMP SWITCH MODE POWER SUPPLY (WELL-LPV-20-15) (CPT-MON-8W)HAS BUILT IN PAGER BUTTON





CPT KIT B3



Intercom Kit includes: 1 x 3" Small Hands Free Colour Monitor(CPT-MON-3), 1 x Gate station with colour camera(CPT-GATE-B) & 1 x Power Supply.





CPT KIT B5



INCLUDES 1X 6.5" SLIM HANDS FREE MONITOR (CPT-MON-5) 1X (CPT-GATE-B) SILVER GATE STATION WITH COLOUR CAMERA 1X SLIM 15V 1.3 AMP SWITCH MODE POWER SUPPLY (WELL-LPV-20-15)





CPT KIT B6

Kit Includes: 1 x MON-6(6.5"monitor), 1 x GATE-B(Video Gate station) & 1 x Power Supply





CPT KIT B8-B



INCLUDES 1X (CPT-MON-8B) PHOTO CAPTURE 7" MONITOR IN BLACK 1X (CPT- GATE-B) SILVER GATE STATION WITH COLOUR CAMERA 1X SLIM 15V 1.3 AMP SWITCH MODE POWER SUPPLY (WELL-LPV-20-15) (CPT-MON-8B)HAS BUILT IN PAGER BUTTON





CPT KIT B8-W

INCLUDES 1X (CPT-MON-8W)
PHOTO CAPTURE 7" MONITOR IN
WHITE
1X (CPT- GATE-B) SILVER GATE
STATION WITH COLOUR AMERA 1X
SLIM 15V 1.3 AMP SWITCH MODE
POWER SUPPLY (WELL-LPV-20-15)
(CPT-MON-8W)HAS BUILT IN PAGER
BUTTON





CPT KIT C5

INCLUDES 1X 6.5" SLIM HANDS FREE MONITOR (CPT-MON-5)

1X (CPT- GATE-C) SURFACE MOUNT GATE STATION WITH COLOUR CAMERA

1X

SLIM 15V 1.3 AMP SWITCH MODE POWER SUPPLY (WELL-LPV-20-15)





CPT KIT C6

INCLUDES 1X 6.5" SLIM HANDS FREE MONITOR (CPT-MON-6)

1X (CPT- GATE-C) SURFACE MOUNT GATE STATION WITH COLOUR CAMERA

1X SLIM 15V 1.3 AMP SWITCH MODE POWER SUPPLY (WELL-LPV-20-15) (CPT-MON-6) HAS BUILT IN PAGER BUTTON





CPT KIT C8-B

KIT INCLUDES 1X (CPT-MON-8B)
PHOTO CAPTURE 7" MONITOR IN
BLACK
1X (CPT- GATE-C) SURFACE MOUNT
GATE STATION WITH COLOUR
CAMERA.
1X SLIM 15V 1.3 AMP SWITCH MODE
POWER SUPPLY (WELL-LPV-20-15)
(CPT-MON-8B)HAS BUILT IN PAGER
BUTTON





CPT KIT E8-B

KIT INCLUDES 1X (CPT-MON-8B)
PHOTO CAPTURE 7" MONITOR IN
BLACK
1X (CPT- GATE-E) FLUSH MOUNT
BRUSHED STAINLESS STEEL
KEYPAD GATE STATION WITH
COLOUR CAMERA. BLUE BACK LIT,
UP TO 40 USERS
1X SLIM 15V 1.3 AMP SWITCH MODE
POWER SUPPLY (WELL-LPV-20-15)
(CPT-MON-8B)HAS BUILT IN PAGER
BUTTON





CPT KIT E8-W

KIT INCLUDES 1X (CPT-MON-8W)
PHOTO CAPTURE 7" MONITOR IN
WHITE
1X (CPT- GATE-E) FLUSH MOUNT
BRUSHED STAINLESS STEEL
KEYPAD GATE STATION WITH
COLOUR CAMERA. BLUE BACK LIT,
UP TO 40 USERS
1X SLIM 15V 1.3 AMP SWITCH MODE
POWER SUPPLY (WELL-LPV-20-15)
(CPT-MON-8W)HAS BUILT IN PAGER
BUTTON





CPT-GATE-A

Silver Video & Audio Gate Station, with Backlit Access Control keypad built in for upto 40 users for LCC dual gate station series (180 x 76 x 60mm)





CPT-GATE-B

Video & Audio Gate Station, for LCC dual gate station series





CPT-GATE-C

Sliver Video & Audio Gate Station, for LCC dual gate station series (132x 95 x 45mm)





CPT-GATE-D

Stainless Steel Video Gate Station (LCC dual gate station series) flush mount







Brushed Stainless Steel Keypad Gate Station up to 40 user codes (LCC dual gate station series) flush mount





CPT-GATE F KP(3)

3 Apartment Flush Mount Call Station with access keypad 40 USERS. BRUSHED STAINLESS STEEL. BLUE BACK LIT WORKS ON 'CPT-MON' Series COLOUR MONITORS 280X 100X 55MM





CPT-GATE F(4)

4 Apartment Flush Mount Call Station, STAINLESS STEEL, BLUE BACK LIT, Works With 'CPT-MON' Series COLOUR MONITORS (Expandable with CPT-GATE F(6) AND CPT-GATE F(9) 280X 100X 55MM





CPT-GATE F(6)

6 Apartment Flush Mount Call Station, STAINLESS STEEL,BLUE BACK LIT, Works With 'CPT-MON' Series COLOUR MONITORS (Expandable with CPT-GATE F(9) 280X 100X 55MM





CPT-GATE F(9)

9 Apartment Flush Mount Call Station, STAINLESS STEEL,BLUE BACK LIT, REQUIRES CPT-GATE F KP(3), Works With 'CPT-MON' Series COLOUR MONITORS 280X 100X 55MM





CPT-PILLAR

KEYPAD/INTERCOM Goose neck plinth polished Stainless (gate station not included)



CPT-GATE E SHROUD

SURFACE MOUNT SHROUD FOR CPT-GATE-F GATE STATIONS



CPT-GATE F SHROUD

SURFACE MOUNT SHROUD FOR CPT-GATE-E





Audio only Hands Free indoor intercom, for LCC dual gate station series (160 x 122 x 40mm)







Small Indoor Monitor 3" TFT for LCC dual gate station series (190 x 112 x 42mm)







Slim Indoor Monitor 6.5" TFT for LCC dual gate station series (220 x 110 x 29mm) Also Available in Black





CPT-MON-6

6.5" Low-Profile white Colour Hands-free Monitor 246x160x22mm (LCC dual gate station series) the Mon-6 has a built-in pager button





CPT-MON-8B

Black 7 inch LCD touch panel LCC monitor with memory module that stores images of all vistors the Mon-8 has a built-in pager button





CPT-MON-8W

White 7 inch LCD touch panel LCC monitor with memory module that stores images of all vistors the Mon-8 has a built-in pager button





CPT-PLUGPACK

14.5VDC / 1Amp NZ plugpack for CPT Intercom range





video intercom DIN RAIL PSU 230V, 14.5V 1300MA (87 x 89 x 61)



CPT-SD5T

audio only intercom DIN RAIL Power Supply 230V, 11-15V 200MA (87 x 89 x 61)



WELL-LPV-20-15

15V 1.3A Switch Mode Power Supply in IP67 Case, 100-240VAC Input (116x34x27mm) Ideal for powering CPT-MON 0-7 range



CPT-SAC550(C) CAT5

CAT5 SYSTEM GATE STATION Stainless Steel, comes with flush fit box, great for apartments or gated communities can have up to 1000 monitors (350mm x 150mm)





CPT-HD3(B)-N

CAT5 NETWORK SYSTEM CONTROLLER, with built in Power supplys (230VAC to 2 x 12VDC 1Amp) 1 for the intercom system and 1 for the Gate Lock. Battery backup ready.





CPT-HS8(2)B

CAT5 SYSTEM 2 USER DISTRIBUTION MODULE





CPT-HS8 (CAT5)

CAT5 SYSTEM 4 USER DISTRIBUTION MODULE





CPT-MT360-T

CAT5 SYSTEM AUDIO HANDS FREE INDOOR STATION





CPT-MT320 (CAT5)W

White CAT5 SYSTEM 6.5" TFT MONITOR (246x160x22mm)





CPT-MT320 (CAT5)B

Black CAT5 SYSTEM 6.5" TFT MONITOR (246x160x22mm)







CAT5 apartment system multi door module up to 4 door stn



AES Wireless intercom Range

Designed and manufactured in the UK

Check the Link for the complete range available on demand www.aap.co.nz/General+Downloads/Brochures







Wireless intercom kit includes 1xController, 1xHandset, 1xStandard Gate station. These units can effortlessly reach 400mtrs (line of Sight) with zero loss of audio quality, upto 3 hand sets can be added for multi room installations allows gate control from all around your home or business





Wireless intercom kit includes 1xController, 1xHandset, 1xKeypad Gate station. These units can effortlessly reach 400mtrs (line of Sight) with zero loss of audio quality, upto 3 hand sets can be added for multi room installations allows gate control from all around your home or business. upto 100 user codes





Additional handset for 605 and 603 wireless intercom Range



ACCESS CONTROL & INTERCOMS





605 Wireless Video Intercom System with integrated access Keypad. This unit can effortlessly transmit video & audio 100mtrs (line of sight) as standard, up to 2 AES-603-EH Audio only handsets can be added





Video Range booster Antenna for 605 wireless Video intercom. Increase the range of the AES-605-ABK upto 250mtrs (line of Sight)





GSM Vandal Resistant AES kit, can have upto 100 call-ID numbers loaded in, The beauty of the AES-GSM-3AB is no matter where you are if some one presses the call button they get the impression you are still home



3G Video Cellular GSM intercom System. This video unit is perfect for giving the impression your home at anytime, allows screen grabs from smart phone. Simply press * on your phone to open. (video works on Android only, not iphone) *phone not included



4 button 2G GSM gate station intercom with AES panel. Rings upto 3 telephone numbers per button available in 2, 4, 6 & 8 button versions (iphone & android app available search GSM-GATE)





Cellular 2G GSM Intercom Kit includes: 1xController, 1xKeypad Gate Station with 4 Call Buttons.
All the Features of the AES-GSM-800AB4 but with a Keypad gate station.





Emergency Touch to Exit Plate with Magnetic Reset 12-24V AC/DC, 5Amp DPDT relay contacts, multiple user settings: for Buzzer On/Off, Fail Safe/Fail Secure & Timer function 0.5, 1, 2, 3 seconds (IQP approved)





WHITE EMERGENCY DOOR RELEASE
CPNT NO/NC Contacts 12-24VDC 10A rated
(87 x 87 x 54)



CPRG CALLPOINT REPLACEMENT GLASS For CPNT (43 x 73 x 2)



ACCESS CONTROL & INTERCOMS



Emergency door release unit 9/16VDC



ROM-SER2W

SCRAMBLER KP-WEIGAND OUTPUT



ROM-SMS2

CG1075 SURFACE MNT KIT for codeguard KP





Capacitive Touch Panic Plate 12-24V AC/DC, 5Amp DPDT relay contacts, multiple user settings: for Buzzer On/Off & Timer function 0, 0.5, 1, 2, 3 seconds (IQP approved)





WES1910

SMALL STAINLESS STEEL PRESS TO EXIT BUTTON FLUSH IP65



WEL1911

Blue Illuminated EXIT BUTTON FLUSH MOMENTARY IP65 STAINLESS STEEL



EB-02

Brushed stainless PRESS TO EXIT BUTTON rectangle (N/O Contacts) (119 x 39 x 27)



WEL2220

STAINLESS STEEL EXIT BUTTON WITH MUSHROOM GREEN PUSH BUTTON (N/O and N/C Contacts)





Request to Exit Capacitive Touch Plate 12-24V AC/DC, 5Amp DPDT relay contacts, multiple user settings: for Buzzer On/Off, Fail Safe/Fail Secure, Latching, Momentary 0.5 & 5 seconds (IQP approved)



7 - ACCESS CONTROL & INTERCOMS









YM-350D

12-24VDC Magnetic clamp for double doors 350Kg holding force per door, dual or individual operation, power to lock



YM-500(LED)

Single Mag 1200lbs Bond Sensing 12-24VDC Mag Clamp, Bond sensing to give you lock ststus with 500Kg Hold Force, Power to lock(Fail Safe)



YM-500W

Single Mag 1200lbs Water Resistant, 12-24VDC Mag Clamp, Power to lock(Fail Safe)



YS-138WR

Weather Resistant Electric Stike, Fail Safe/Fail Secure



YS-138NC-S

ANSI Electric Strike 12VDC, Monitoring contacts, Power to Lock(Fail Safe)



YS-138NO-S

ANSI Electric Strike 12VDC, Monitoring contacts, Power to Unlock(Fail Secure)



110D

Electric Gate Lock with double european cylinder, perfect for pedestrian and swing gates. Power to Unlock(Fail Secure)



109


GROUND CATCH FOR VIRO LOCK, for 110D




109A

SIDE MOUNT CATCH FOR VIRO LOCK, for 110D



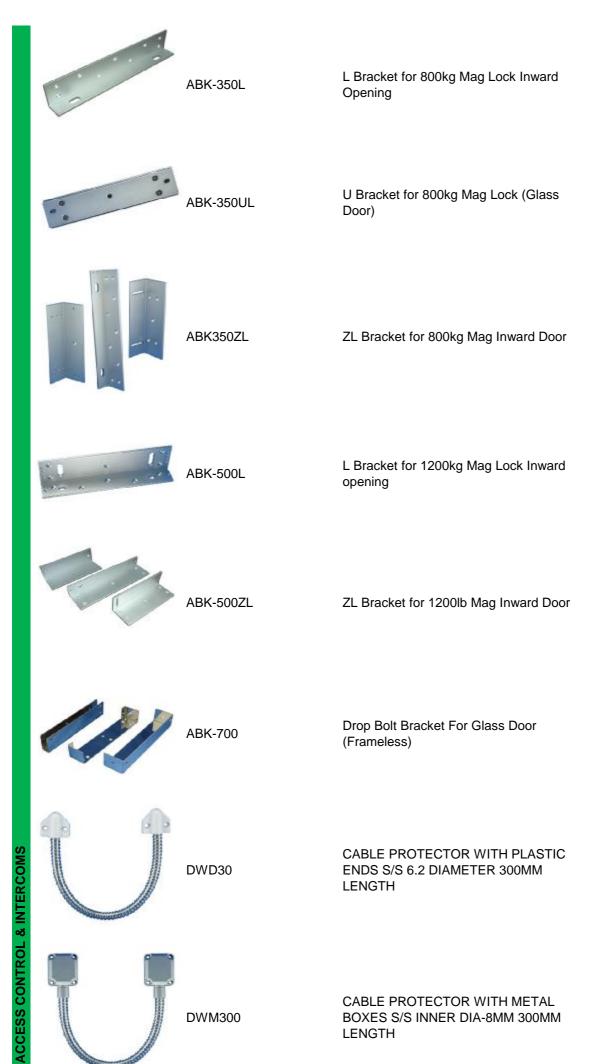

18 - GATE AUTOMATION



Kit Includes: 1 x BULL5M 230V Sliding Gate Motor & controller 1 x set of Point to Point Beams 1 x Radio receiver with 2 x Remotes, 3 lengths of Nylon Geared Racking, 2 x 3 meter lengths of U-Section Track and 2 x 80mm U-section Wheels







Kit Includes: 2 x B-BOB30M 230V Screw Actuators, 1 x GATE-230B Controller, 1 x Radio Receiver with 2 x Remotes and 1 x set of Point to Point Beams





B-BILL30ML


STYLE SCREW DRIVE LEFT SIDE POWER SOURCE 230VAC **DUTY CYCLE** 30% THRUST 3200 NEWTON'S **MECHANICAL STOPS** NO **LIMIT SWITCHES NO CONTROLLER** REQUIRES GATE 230B

ARM NOT APPLICABLE

GATE LENGTH LEAFS UP TO 3m

BATTERY BACK UP NO

SELF LOCKING







B-BILL30MR

B-BOB30M

ARM NOT APPLICABLE

GATE LENGTH LEAFS UP TO 3m

BATTERY BACK UP NO

SELF LOCKING

STYLE SCREW DRIVE POWER SOURCE 230VAC **DUTY CYCLE** 30% THRUST 3200 NEWTON'S **MECHANICAL STOPS** YES **LIMIT SWITCHES NO CONTROLLER** REQUIRES GATE 230B



ARM NOT APPLICABLE

GATE LENGTH LEAFS UP TO 3m

BATTERY BACK UP NO

SELF LOCKING

STYLE SCREW DRIVE **POWER SOURCE** 230VAC **DUTY CYCLE INTENSIVE USE** THRUST 3500 NEWTON'S **MECHANICAL STOPS** YES **LIMIT SWITCHES** YES **CONTROLLER** REQUIRES GATE 230B **ARM NOT APPLICABLE**



8 - GATE AUTOMATION

B-BOB50M

GATE LENGTH LEAFS UP TO 5m

BATTERY BACK UP NO

SELF LOCKING

			STYLE SCREW DRIVE	
		B-BOB3024E	POWER SOURCE 24V DUTY CYCLE INTENSIVE USE THRUST 1800 NEWTON'S MECHANICAL STOPS YES LIMIT SWITCHES NO CONTROLLER REQUIRES (B-BRAINEY) ARM NOT APPLICABLE GATE LENGTH LEAFS UP TO 3m	
-		B-BOB5024	BATTERY BACK UP YES SELF LOCKING STYLE SCREW DRIVE POWER SOURCE 24V DUTY CYCLE INTENSIVE USE THRUST 2200 NEWTON'S MECHANICAL STOPS YES LIMIT SWITCHES YES CONTROLLER REQUIRES (B-BRAINEY) ARM NOT APPLICABLE GATE LENGTH LEAFS UP TO 5m BATTERY BACK UP YES SELF LOCKING	-
		B-HD35AC	STYLE HYDRAULIC ACTUATOR POWER SOURCE 230VAC DUTY CYCLE INTENSIVE THRUST 4200 NEWTON'S MECHANICAL STOPS LIMIT SWITCHES CONTROLLER REQUIRES GATE 230B ARM NOT APPLICABLE GATE LENGTH UP TO 3.5m @500KG BATTERY BACK UP NO SELF LOCKING UP TO 1.8 METERS TWO WAY BLOCKING YES	
		B-HD50	STYLE SCREW DRIVE POWER SOURCE 230VAC DUTY CYCLE INTENSIVE THRUST 4200 NEWTON'S MECHANICAL STOPS NO LIMIT SWITCHES NO CONTROLLER REQUIRES GATE 230B ARM NOT APPLICABLE GATE LENGTH UP TO 5m BATTERY BACK UP NO SELF LOCKING UP TO 1.8 METERS SELF LOCKING NO	
18 - GATE AUTOMATION	*ARM NOT INCLUDED	B-PR45E	STYLE HINGE ARM POWER SOURCE 230VAC DUTY CYCLE 30% TORQUE 325 Nm MECHANICAL STOPS NO LIMIT SWITCHES YES CONTROLLER REQUIRES GATE 230B ARM REQUIRES(B-DUE2) GATE LENGTH LEAFS UP TO 4m BATTERY BACK UP NO SELF LOCKING	18 - GATE AUTOMATION



B-PR45E24



TORQUE 320 Nm

MECHANICAL STOPS NO

LIMIT SWITCHES YES

CONTROLLER REQUIRES (B-BRAINEY)

ARM REQUIRES (B-DUE2)

GATE LENGTH LEAFS UP TO 4m

BATTERY BACK UP YES

SELF LOCKING





B-DUE2

GALV STEEL HINGE ARM FOR ARTICULATED ARM ACTUATORS



B-BULL5M

B-BULL624-CBY

B-BULL20M

STYLE SLIDING GATE MOTOR POWER SOURCE 230V AC

DUTY CYCLE 30%

THRUST 650 NEWTON'S

MECHANICAL STOPS N/A

LIMIT SWITCHES YES

CONTROLLER BUILT IN ARM NOT APPLICABLE

GATE LEAFS UP TO 500 KG

BATTERY BACK UP NO

SELF LOCKING

STYLE SLIDING GATE MOTOR

POWER SOURCE 24V

DUTY CYCLE INTENSIVE USE

THRUST 857 NEWTON'S

MECHANICAL STOPS N/A

LIMIT SWITCHES YES (BUILT IN)

CONTROLLER BUILT IN

ARM NOT APPLICABLE

GATE LEAFS UP TO 600 KG

BATTERY BACK UP YES

SELF LOCKING

STYLE SLIDING GATE MOTOR

POWER SOURCE 230V AC

DUTY CYCLE 40%

THRUST 1667 NEWTON'S

MECHANICAL STOPS N/A

LIMIT SWITCHES YES

CONTROLLER BUILT IN

ARM NOT APPLICABLE

GATE LEAFS UP TO 2000 KG

BATTERY BACK UP NO

SELF LOCKING





		B-197.1	Nylon rack 1000x28x22mm
	The state of the s	B-192.1	Metal Rack 1005x30x12mm
		B-187.3	3M U-SECTION GATE TRACK FOR SLIDING GATES 20mm
	0	B-111.80	80MM U-SECTION GATE WHEEL 20mm
	0/0	B-111.100	100MM U-SECTION GATE WHEEL 20mm
18 - GATE AUTOMATION		B-203.3	4 ROLLER GUIDE PLATE 30-100mm Gap
		B-203.2	2 ROLLER FIXED GUIDE PLATE 40-80mm Gap





B-535.0

LIMIT STOP TO BE FIXED FOR SWING GATES





CPT-PILLAR

KEYPAD/INTERCOM Goose neck plinth polished Stainless (gate station not included)



Boxed 230VAC GATE CONTROLLER for Single and Double actuator with limit switch inputs





Replacement Circuit Board for 5/24RR/F 24V sliding gate motor



Replacement Circuit board for 403E & 803 230V sliding gate motors



BRAINY24 CONTROL PANEL With battery charging

19 - FIRE ACCESSORIES



Floor Mount right angle magnetic Door

Holder with release button, 12-24VDC,

50Kg Hold Force

YD-606

20 - BATTERIES



DM12-1.3PP

1.3Ah 12V POWERPAC BATTERY (100

x 45 x 52)



DM12-2

2Ah 12V POWERPAC BATTERY

170x60x35mm



DM12-3

3Ah 12V POWERPAC BATTERY SLA

(133 x 68 x 60)



DM12-5A/H

5Ah 12V BATTERY (90 X 101 X 70)



DM12-7.5

7.5Ah 12V POWERPAC BATTERY (150

x 65 x 95)



DM12-9

9 Ah 12V POWERPAC BATTERY (150 x

65 x 95)



DM12-12

12Ah 12V POWERPAC BATTERY

(159 x 100 x 100)



DM12-18PP

18Ah 12V POWERPAC BATTERY (180

x 75 x 165)



DM12-40

40Ah 12V POWERPAC BATTERY (H=175 W=195 D=165)



DM6V-1.3A

6V 1.3Ah POWERPAC BATTERY FOR SOLAR BELL (96 x 24 x 55)



DM6-5A

6V 5Ah POWERPAC BATTERY (46 x 70 x 105)




DM6-12A

6V 12Ah POWERPAC BATTERY (150 x 50 x 100)



3.6V

1/2 AA 3.6V LITHIUM BATTERY used in





CR-123AW

3V LITHIUM BATTERY USED IN TRX PIR'S, DFW PIR'S & DMP PIR'S



ER26500

Li-SOCL2 Energy Type Cylindrical Battery used in TRX Keypad-B, TRX External, TRX Internal & TRX Output



CR2016

LITHIUM BATTERY CR2016 3 VOLT 90M/AH (2 x in RM Pendant's)



CR2032 CELL

CR2032 BUTTON CELL BATTERY used in TRX Pendant's



CR2450

CR2450 Lithium Battery. Used in TRX Keypad



142-004 A23 12V Miniture Battery (10 x 28)

12V ALKALINE A27 BATTERY (8 X 28)

142-006 9V BATTERY (48 x 26 x 18)

142-007 9V LITHIUM BATTERY - Single Blister Pack (50 x 26 x 17)

AAA-NIMH Batteries With Tags as used in JNSTAR Beams

AAA AAA BATTERY (4-PACK)

AA-4 AA BATTERY (4-PACK) Super Alkaline
Blister Card Pack

C-SIZE C SIZE BATTERY (2-PACK)

D-SIZE D SIZE BATTERY (2-PACK)

BC-12500 BATTERY CHARGER SLA 12V/1000mA (83727400)

21 - CABLE





DC 2.1 SPLITTER

1 x 2.1mm DC socket in/4 x 2.1mm DC plugs out



BNC MALE TO RCA FEMALE ADAPTOR (23 x 19)



RCA PLUG TO BNC FEMALE



F- Connector for RG58 or RG6 (20 x 11)



EC-1008

DOUBLE BNC FEMALE CONNECTOR (33 x 12)





EC-1009B

BNC MALE CRIMP (0.7mm Pin Size)



BNC CRIMP/M 0.9

BNC - RG59T crimp plug (0.9mm Pin Size)





BNC CRIMP/M

BNC - RG6 crimp plug (centre pin 1.10 mm outer sheath is 6.9mm)



2.1mm DC male plug/male DC terminal connector



2.1mm DC female to rising clamp terminal block connector

22 - CONTROL, RELAYS AND TIMERS



AT1 TIMER BOARD, 11 different timer modes, 4 timing ranges, 1 second to 21 hours, 12-24V AC/DC operation, 10A Relay output. (90 x 48 x 20)







AT1 in ABS plastic Box





TIME CONTROLLER 8 TIME ZONES, 3 OUTPUTS +MUCH MORE





1 Amp SPDT Relay board this 12V coil (43 x 39 x 18)





10 Amp SPDT Relay board with 12V coil (43 x 39 x 25)





DPDT Relay with 5 Amp contacts and 12volt coil (43 x 39 x 25)





24V AC/DC TRIGGER RELAY SPDT 10 Amp Contacts (43 x 39 x 25)





5 Amp DPDT 12 volt relay with low current pos/neg trigger input (43 x 39 x 25)





This High Current relay when triggered draws power from the Backup Battery, ideal for running big sirens off an alarm panel, without the need for an extra powersupply. (43 x 39 x 25)

23 - LENSES AND BRACKETS



SWAN QUAD LENS

LONG RANGE CURTAIN LENS FOR SWAN QUAD, DMP & DFW PIR'S



CRLND002

LONG RANGE LENS FOR D&D PIR

CRLND003

VERTICAL CURTAIN LENS FOR D&D

CRLNG002

LONG RANGE LENS FOR GENIUS 10





VERTICAL CURTAIN LENS FOR

GENIUS

CRLNL001

STANDARD LENS FOR MERLIN/LYNX



LONG RANGE LENS FOR CRLNL002

MERLIN/LYNX PIR



D

VERTICAL CURTAIN LENS FOR CRLNL003

MERLIN/LYNX PIR



IRS112

IR100B CURTAIN MIRROR 20MTR



IRUM20

WALL MOUNT BRACKET IR110/120





EDS-BRACKET

BRACKET FOR ESD2000



SWAN BKT

BRACKET ASSEMBLY FOR SWAN

23 - LENSES AND BRACKETS

QUAD (0980530)



24 - PLASTIC ENCLOSURES



PLAS BOX-XXXL 220x300x150mm IP55 24 - PLASTIC ENCLOSURES

25 - PLUG PACKS



PS12300EP

500MA 12V DC REGULATED PLUG PACK (WITH AUSTRALIA / NZ PLUG)



PS5500PP

Switch Mode Plug Pack for TRX 2-Way Wireless Range. 5.5Volt 500mA regulated, with 2.1mm DC plug on end



PS121000PP

SWITCH MODE PLUG PACK 12VDC 1A



PS124160

12V DC 4AMP SWITCH MODE IN-LINE POWER PACK



MEDIO PLUGPACK

300MA AC PLUGPACK 15VAC



TEPP16V

16V AC 1.5AMP PLUGPACK, can be used to power Elite Alarm system range.



CPT-PLUGPACK

14.5VDC / 1Amp NZ plugpack for CPT Intercom range

26 - POWER SUPPLIES 12VDC



Charging (200 x 92 x 60)





24V AC 8 AMP BOXED, 16 fused outlets (260x310x80mm)







24VAC 16A POWER SUPPLY, 16 FUSED OUTLETS, MAINS & FUSE FAIL OUTPUTS.



POWER SUPPLIES 24VA(



27 - POWER SUPPLIES 24VAC



RACK MOUNT FRONT PANEL FOR PS24/AC-16 & PS18 (powersupply Not included)

28 - POWER SUPPLIES 24VDC





27.6V 1.5A PLATED POWER SUPPLY, Battery Charging (200 x 92 x 60)







PSU 1 26.8V 1A BOXED POWER SUPPLY, Battery Charging (260 x 92 x 80)







PSU1 26.8V 1A MODULE ONLY (Requires 25-27VAC power source)





PS24/3 26.8V 3A PLATED PLATINUM SERIES PSU, Battery Charging, Mains & Battery Fail outputs.







PS24/3 26.8V 3A Boxed Power Supply with Battery Charging, Main & Battery Fail outputs.







24VDC 6.5AMP CURRENT LIMITED SWITCH MODE POWER SUPPLY MODULE (230VAC INPUT)




PS24/6.5B
The state of the s

24V 6.5AMP SUPPLY WITH FIRE PANEL CONTROLLED O/PUT

29 - TOOLS			
12" BELL	BES-BELL1412	Ø1/4" X 12" BELL HANGERS BITS	
	BES-BELL3812	Ø3/8" X 12" BELL HANGERS BITS	
\$4343434 44444	BES-BELL1212	Ø1/2" X 12" BELL HANGERS BITS	
24" BELL	BES-BELL1424	Ø1/4" X 24" BELL HANGER'S BITS	
4575575	BES-BELL3824	Ø3/8" X 24" BELL HANGER'S BITS	
2000000 2000000	BES-BELL1224	Ø1/2" X 24" BELL HANGER'S BIT	
	BES-BELL5824	Ø5/8" X 24" BELL HANGER'S BITS	
36" BELL	BES-BELL1436	Ø1/4" X 36" Bell Hangers Bit	
Separate Sep	BES-BELL3836	Ø3/8" X 36" Bell Hangers Bit	
24" FLEX	BES-FLX1424	Ø1/4" X 24" HSS Flex Bit Piranhabit- High Speed Steel	
AND THE STATE OF T	BES-FLX3824	Ø3/8" X 24" HSS Flex Bit Piranhabit- High Speed Steel	
44444	BES-FLX1224	Ø1/2" X 24" HSS Flex Bit Piranhabit- High Speed Steel	
36" FLEX	BES-FLX1436	Ø1/4" X 36" HSS Flex Bit Piranhabit- High Speed Steel	
MEANIE	BES-FLX3836	Ø3/8" X 36" HSS FLEX BIT PIRANHABIT-HIGH SPEED STEEL	
40000000000000000000000000000000000000	BES-FLX1236	Ø1/2" X 36" HSS FLEX BIT PIRANHABIT-HIGH SPEED STEEL	
54" FLEX	BES-FLX1454	Ø1/4" X 54" HSS FLEX BIT PIRANHABIT-HIGH SPEED STEEL	
	BES-FLX3854	Ø3/8 X 54" HSS FLEX BIT PIRANHABIT- HIGH SPEED STEEL	STO
243434	BES-FLX1254	Ø1/2" X 54" HSS FLEX BIT PIRANHABIT-HIGH SPEED STEEL	29 - TOC

29 - TOOLS

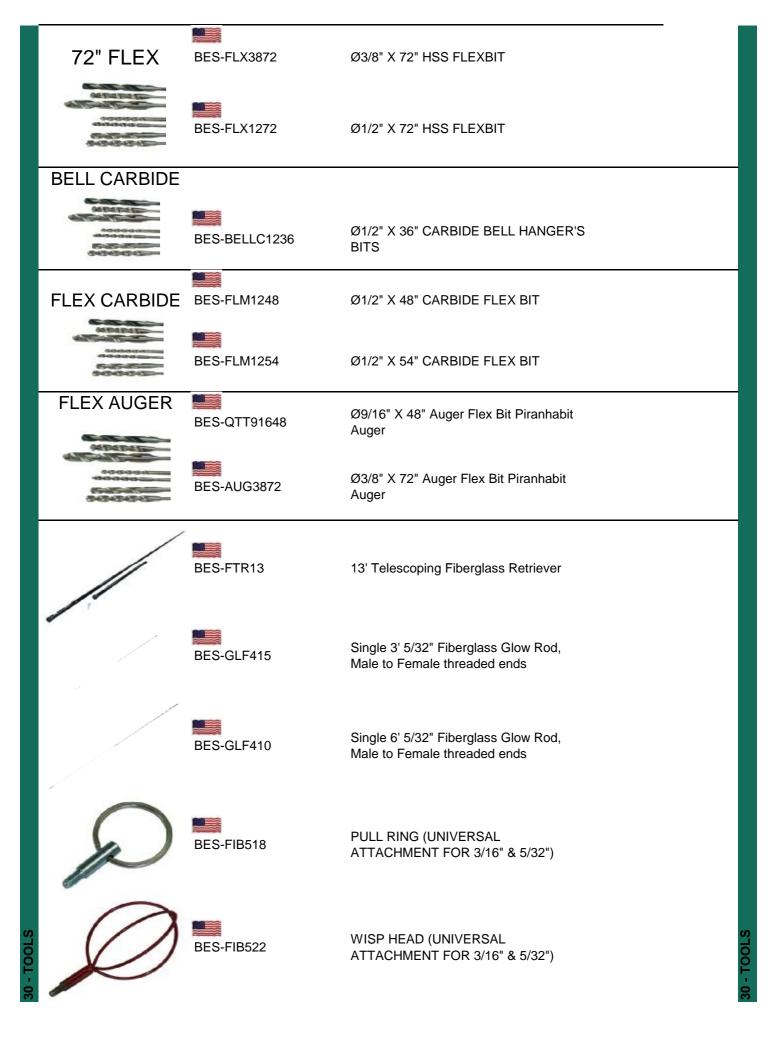



WRIST MAGNET



AG-T202

PAL CCTV TESTERS WITH POWERPACK 3" Monitor with 12VDC output to power the camera your setting up



CRGB TESTER

GLASS BREAK TESTER



LOE205/AU

GP HEADLAMP 0.5W LED, 55 hour run time. 3 x AAA batterys included



CRIMP TOOL

Crimp Tool for Coax Cable



STRIPPING TOOL

Stripping Tool For Coax Cable



BEANIE GEL

Gel Filled Crimp Connector (Jar 200 pcs)



TAPE BLACK20M

BLACK INSULATION TAPE 20M




TAPE GREEN20M

GREEN INSULATION TAPE 20M



TAPE RED20M

RED INSULATION TAPE 20M



WHITE INSULATION TAPE 20M

30 - CCTV





4 CHANNEL ITX HI RES DVR with 1Tb SV35 HDD, 4 x Indoor 600TVL Camera's with IR, 4 x 23mtr Pre-made RG59T cables, PSU and mouse







4 CHANNEL ITX HI RES DVR with 1Tb SV35 HDD, 4 x Outdoor 600TVL mini dome Camera's with IR, 4 x 23mtr Premade RG59T cables, PSU and mouse







4 Channel H264 High Res DVR 960H Playback, 1TB SV35 HARD DRIVE, NETWORK, HDMI, VGA, 2 x USB







8 CHANNEL DVR, 1TB SV35 3YEAR WARRANTY HARD DRIVER, Feature 2 x USB ports for mouse or video transfer, HDMI & VGA output, H.264, Network, 960H Playback







ITX 16ch DVR ATM1624/H.264/ 1TB SV35 3YEAR WARRANTY HARD DRIVE/ DVD RW/200fps







4 CH. HD-SDI DVR 30FPS @ 1080p per camera with 2tb Black Series HDD $\,$







ITX Hybrid HD-SDI DVR with 2TB Black series HDD, HDMI out, 4 HD and 4 SDI inputs







Hybrid HD-SDI DVR 8 + 8 with 2TB Black series HDD







IP65 covert Camera/DVR With Colour **HUNTING CAM** Screen and Battery Box PAL



HUNTING CAM CASE Enclosure for HUNTING CAM









DN-DIR3.66

DN-DIR3.6

DN-DIR8.0

DN-DIR12





600TVL White Mini IR Dome Effio-E IP66 Weather Proof



600tvl 1/3 next chip weatherproof dome, 3.6mm, DWDR, 12v DC day night

12vDC day night



600tvl 1/3 next chip weatherproof dome, 8.0mm, DWDR, 12v DC day night



600tvl 1/3 next chip weatherproof dome, 12.0mm, DWDR, 12v DC day night



700tvl 1/3 Sony Efio-E chip weatherproof dome, MEGA lens 2.8 - 12mm, WDR,











Pin Hole 2.1MP HD bullet camera weather resistant







Covert 700TVL Smoke Detector Camera







PET PIR upto 25Kg, with Built in Covert Colour Pinhole 420TVL Camera, 12-14VDC (123 x 60 x 38)





F-IR-30T

30 MTR INFRARED ILLUMINATOR 12VDC



F-IR-100T

100 MTR INFRARED ILLUMINATOR 230VAC or 12 VDC



MONLGL2051

LG 20" 20EN33 HD LED Monitor 1600x900



LG-MONITOR HD

21.5" LED Monitor DVI+VGA 1920x1080



AVM-138NZ

RF TV Modulator with plug pack, Coverts Composite Video to RF, display your CCTV images on TV's around the House



CPS-201

Kit allows 3 video signals on one coax cable/distance up to 200m



5.8G Wireless Transmitter & Receiver kit with NZ adaptor. Can transmit Composite video upto 200 meters line of sight with standard antenna's supplied.

18dbi panel antenna with extension cable/SMA male to N type (1 pc) For TR-5850 can increase range up to 500 meters line of sight

Hi-Performance Video Ground Loop Isolator, eliminate electrical Hum from images

TWISTED PAIR TRANSMITTER, Send composite video down Cat5e upto 300m, (requires 1 at each end)

SWITCH MODE PLUG PACK 12VDC 1A

12V DC 4AMP SWITCH MODE IN-LINE POWER PACK

24V AC 8 AMP BOXED, 16 fused outlets (260x310x80mm)

12V 5A Plated Power Supply with Battery Backup and Mains & Battery Monitoring (excellent for 12 Volt Camera Systems)

12V 5A Boxed Power Supply with Battery Backup and Mains & Battery Monitoring (excellent for 12 Volt Camera Systems)





12VDC 18AMP BOXED SUPPLY WITH 16FUSED OP, MAIN & FUSE FAIL OP (NON BATTERY CHARGING)





24VAC 16A POWER SUPPLY, 16 FUSED OUTLETS, MAINS & FUSE FAIL OUTPUTS.





Safely power 8 low voltage devices from one power feed, 8 x 1.6Amp Fused Outlets, features 2.1mm DC Plug input (150 x 50 x 23)





FUSED BOARD-8 mounted in a PLAS BOX-L, IP-55



RG59T-75

Premade Coax and Twin CCTV Cable Complete with Fittings - 23Meter BNC and DC 2.1mm Plugs'



DC 2.1 SPLITTER

1 x 2.1mm DC socket in/4 x 2.1mm DC plugs out



CCTV SIGN-L

LARGE VIDEO WARNING SIGN (295 x 240mm)



CCTV SIGN-S

SMALL VIDEO WARNING SIGN (295 x 240mm)



CCTV STICKER

WARNING SURVEILLANCE CAMERAS STICKER