
Interface Receiver for EliteControl

AAP-RECEIVER

Integrate your AAP-SMOKE & AAP-HEAT directly into your EliteControl System



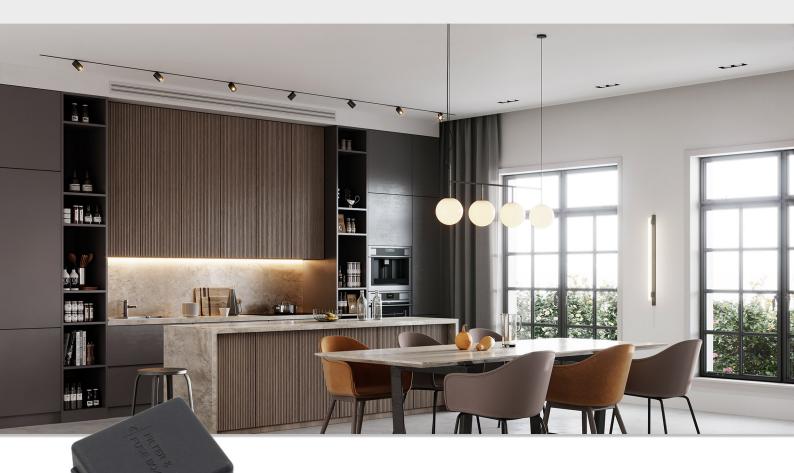

If you want to integrate the AAP-SMOKE & AAP-HEAT into your EliteControl system you will require the AAP-RECEIVER.

Specifications

- DC 12V Input / 1 Channel Relay
- Working Current: 8mA
- Frequency:433MHz
- Output Mode: Switching Signal (Dry Contact)
- Working Mode: Momentary / Toggle / Latching
- Max Load of Relay Contact: 7A
- Dimensions: 56 x 45 x 28mm





1A Emirali Road, Silverdale, 0932, Auckland, New Zealand www.aap.co.nz