


# Dual Swing Gate Kit

B-BOB3024E.P

24V/DC Electromechanical Geared Motor Kit

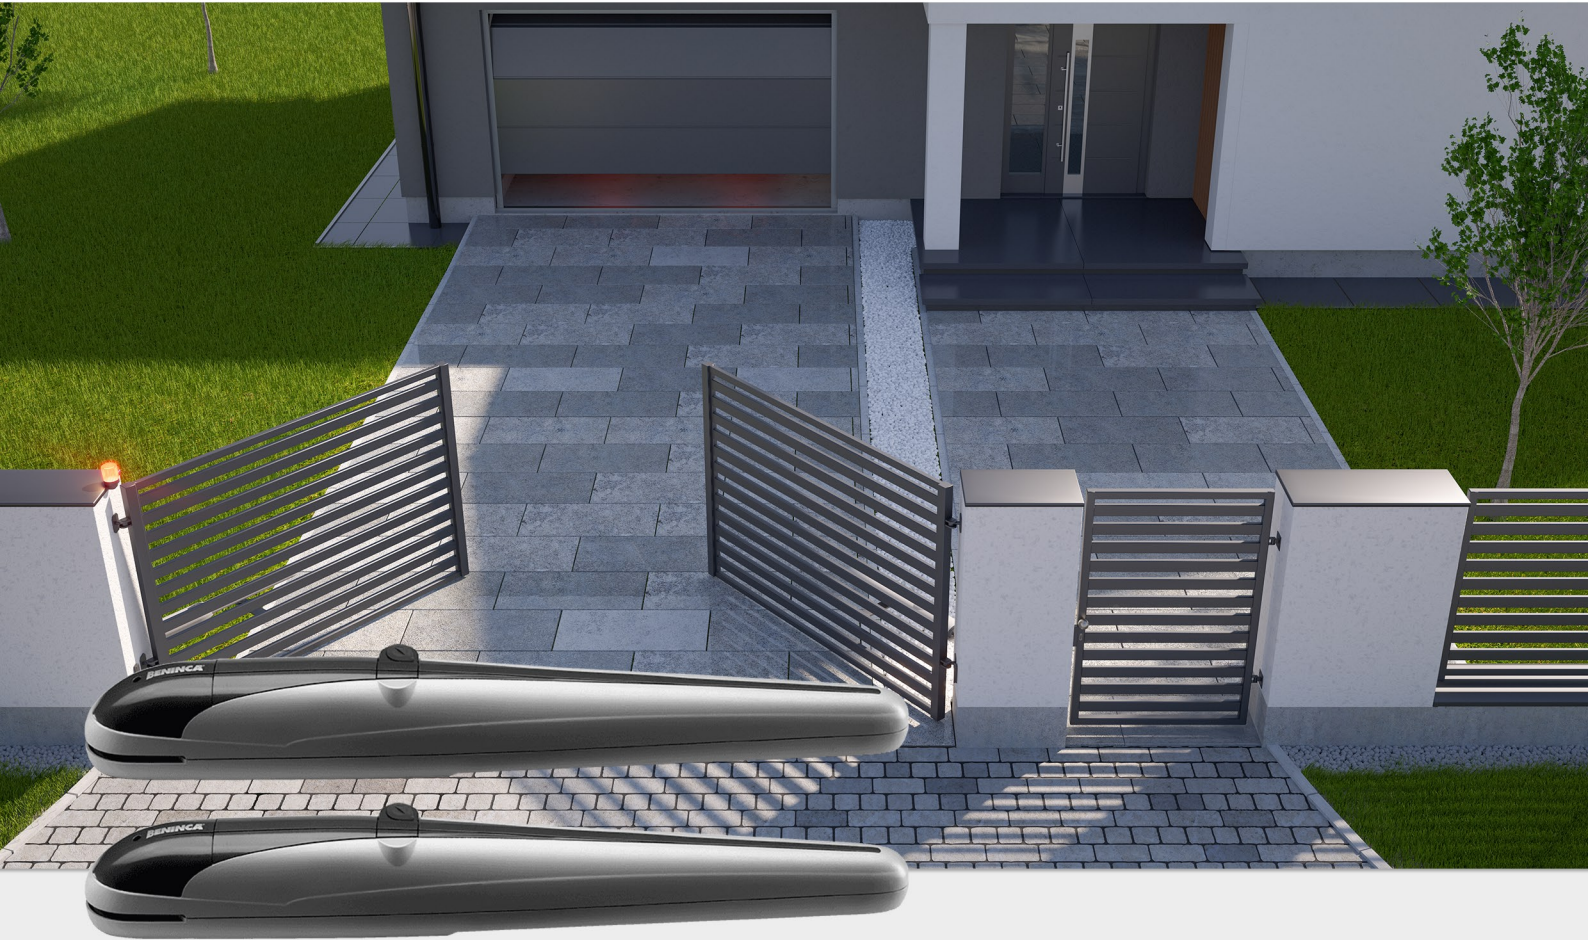

## Features

- 2 x Irreversible 24 V/DC electromechanical geared motors for intensive use
- Equipped with encoder which maximises safety & precision in the gate moving phases
- Amperometric sensor obstacle detection system to prevent crushing
- Reliable, quiet, and quick to install geared motor

## Kit Contents

2 x B-BOB3024E

1 x B-BRAINY24

1 x B-PUPILLA.T

2 x B-TO.GO2VA

2 x B-BSR



Motor supply	24 V/DC
Max absorbed current	5.5 A
Maximum thrust	1800 N
Opening time	9" ÷ 21"
Standard stroke	270 mm
Max stroke	325 mm
Duty cycle	Intensive use
Protection level	IP44
Built-in control unit	No
Encoder	Yes
Operating temperature	-20°C /+50°C
Lubrication	Grease
Leaf max dimension	3.0 m
Weight	8.0 kg
Kit weight	20.7 kg



**Control Unit**

B-BOB3024E ——— B-BRAINY24

### Product Dimensions

