



Swing Gate Kit

B-BOB3024KIT-2

24V Swing Gate Automation for Gates up to 3m

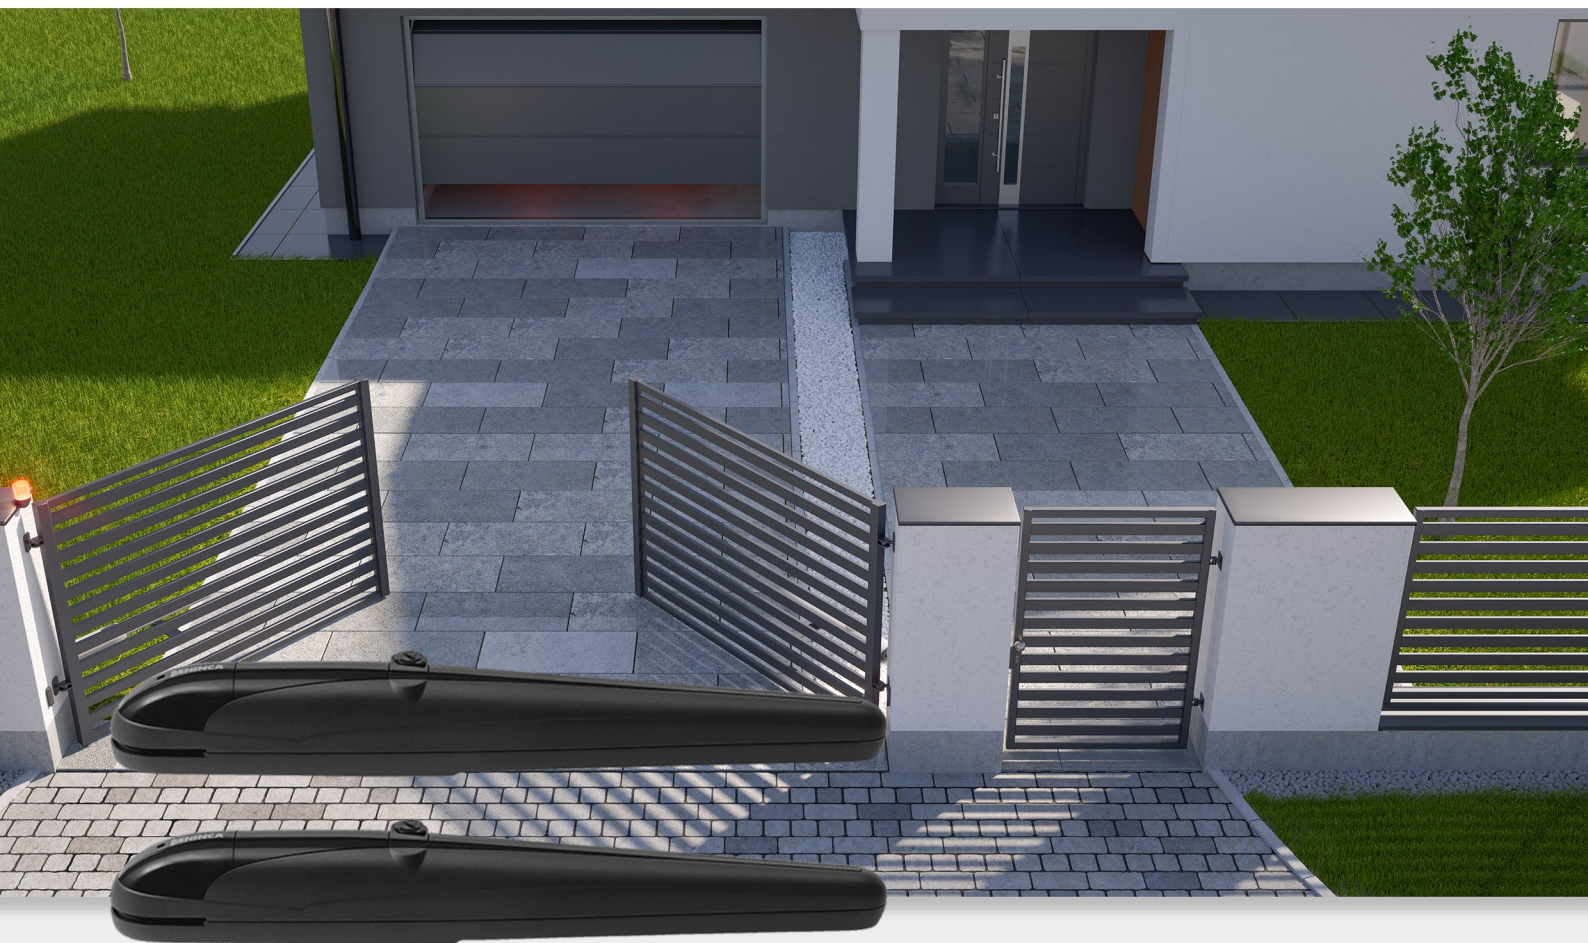

Kit includes

- 2 x B-BOB3024E Actuator
- 1 x B-TRUST24 Controller
- 2 x B-TO.GO2VA Remote
- 1 x B-PUPILLA.T Beam

Features

- Irreversible 24 V/DC electromechanical geared motor for intensive use, equipped with encoder
- The TRUST24 control unit ensures power consumption in standby mode of < 0.8 W
- The encoder device ensures maximum safety and precision in the gate moving phases
- Amperometric sensor obstacle detection system to prevent crushing





Motor Supply	24V DC
Max absorbed current	5.5 A
Maximum thrust	1800 N
Opening time	9" ÷ 21"
Duty cycle	Intensive use
Standard stroke	270mm
Max stroke	325mm
Protection level	IP44
Encoder	Yes
Operating temperature	-20°C /+50°C
Leaf max dimension	3 m
Weight	8 kg

**Control Unit**

B-BOB3024E ——— TRUST24

Product Dimensions

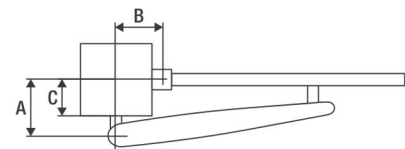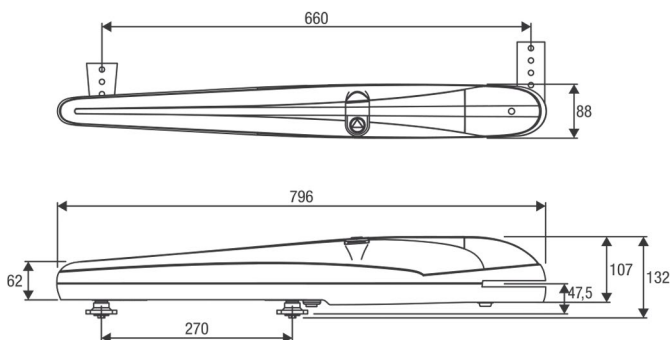

A (mm)	B (mm)	C (mm)
105-135	115-135	50-80