

Swing Gate Kit


B-BOB5024KIT-1

24V Swing Gate Automation for Gates up to 5m



Kit includes

- 1 x B-BOB5024 Actuator
- 1 x B-BSR50 Bracket
- 1 x B-TRUST24 Controller
- 2 x B-TO.GO2VA Remote
- 1 x B-PUPILLA.T Beam

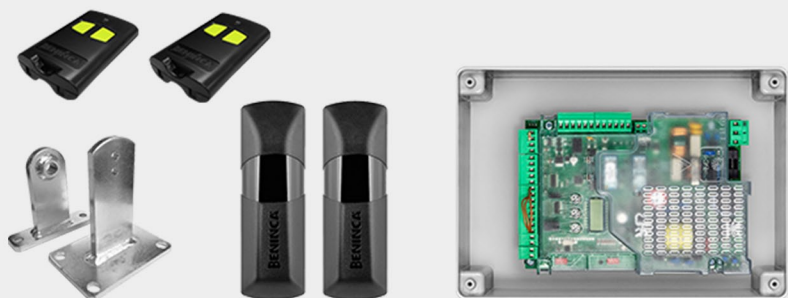

Features

- Irreversible 24 V/DC electromechanical geared motor for intensive use, equipped with encoder
- The encoder device ensures maximum safety and precision in the gate moving phases
- Amperometric sensor obstacle detection system to prevent crushing

Gate Automation with

BENINCA
TECHNOLOGY TO OPEN

2 Year

Warranty



B-BOB5024

Specifications





Motor Supply	24V DC
Max absorbed current	6.7 A
Maximum thrust	2200 N
Opening time	21"
Duty cycle	Intensive use
Standard stroke	455mm
Max stroke	520mm
Protection level	IP44
Encoder	Yes
Operating temperature	-20°C /+50°C
Leaf max dimension	5 m
Weight	10.20 kg



Control Unit

B-BOB5024E ——— TRUST24

Product Dimensions

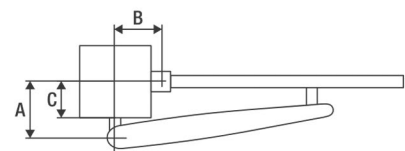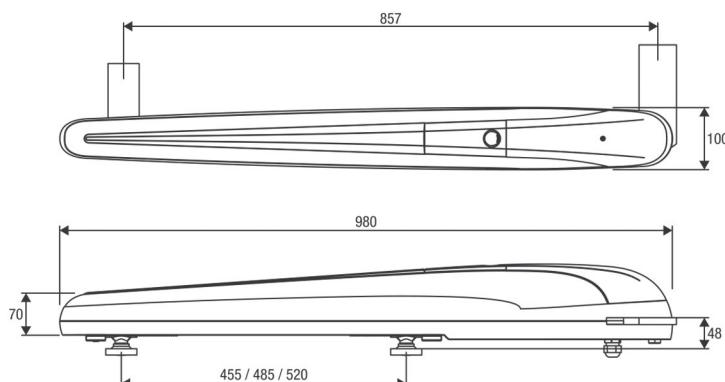

A (mm)	B (mm)	C (mm)
150-225	150-225	90-155