

# Outdoor Short Range Beam

OPT-AX-200TN

Compact & Durable Photoelectric Detector




## Features

- 60m detection range
- Anti-frost hood cover
- Outdoor ready IP55
- Easy angle adjustment
- High grade spherical
- Adjustable beam interruption period
- 99% beam blocking stability

**IP65 structure with high sealing rubber packing**

Rubber packing is used for all conceivable points where water or dust may penetrate, such as wiring holes, wire ports and the outer chassis. Prevention from dust, bugs and water delivers performance with higher reliability against false alarms and breakdowns.

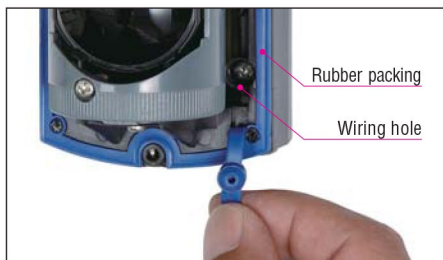

**IP65**

- Waterproof.** Protected against water jets from any direction
- Dust-tight.** No ingress of dust.
- International Protection Code.** It shows the degree of protection provided by enclosures.

**Anti-frost hood cover**

A hood is installed to prevent frost forming on lower beams. It also makes the maintenance easy because the surface of cover is flat.

**Easy angle adjustment**

It allows the installer to finely adjust the beam easily.

**High grade spherical lens**

The high grade spherical lens creates more sharply defined and precise infrared beams compared to ordinary fresnel lenses.

**99% beam blocking stability**

Enables stable operation with as much as 99% loss of beam energy caused by heavy rain, dust storms, fog or snow.

**A.G.C. (Automatic Gain Control) Circuit**


A.G.C. circuit continually monitors for gradual changes in the signal's strength caused by changing weather conditions. It adjusts the sensitivity accordingly to maintain the proper signal level for the current environmental conditions.

**Adjustable beam interruption period**

The beam interruption time can be adjusted to fit any application. For example, when protecting a wall or fence, a longer interruption time will catch intruders.

**Lightning protection**


An improved Electro-Magnetic Interference surge absorber and high surge resistive relay has been installed to protect from lightning surges and maintain stable operation.

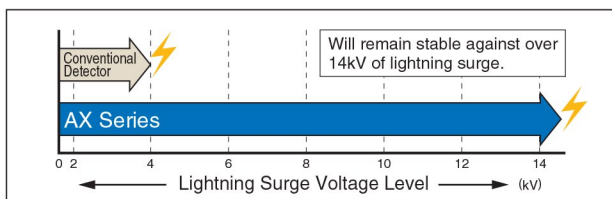

**Specifications**

Model	AX-200TN
Maximum detection range	60m (200ft)
Maximum arrival distance	600m (2000ft)
Detection method	Infrared beam interruption detection
Interruption period	Selectable between 50, 100, 250, 500msec (four steps)
Power supply	10.5 – 28V DC
Current consumption (Transmitter + Receiver)	45mA max.
Alarm period	2sec (±1) Nominal
Alarm output	N.C. 28V DC, 0.2A max.
Tamper switch	N.C.; open when cover is removed 28V DC, 0.2A max.
Operating temperature	-35°C – +60°C (-31°F – +140°F)
Environment humidity	95% max.
Alignment angle	± 90° Horizontal, ± 5° Vertical
Location of installation	Indoor / Outdoor : Wall / Pole Mounting
Weight (Transmitter + Receiver)	650g (22.9oz)

**Dimensions**

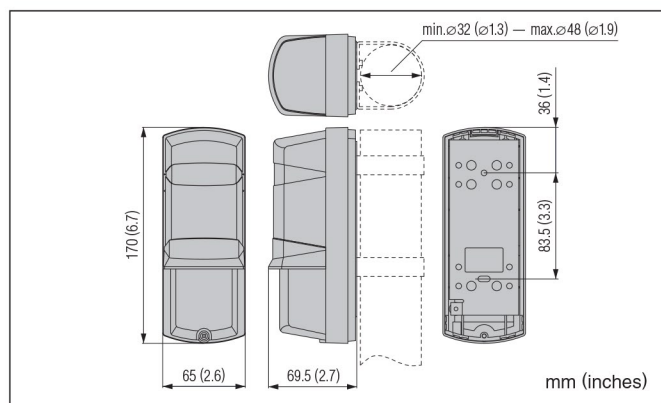

**Options**

- HU-3 : Heating Unit**  
Heating unit for severe low temperature conditions  
24V DC/AC, 420mA max.
- BC-3 : Back Cover**  
Back cover to conceal the pole.
- PSC-3 : Pole Side Cover**  
Cover for installing 2 units to 1 pole.

