


CAMERA

# TD-9462S4

## 6MP IR Water-proof Bullet Network Camera



- H.265+ /H.265 /H.264+/H.264/MJPEG coding
- Starlight
- Max.resolution: 6MP (3072 × 2048)
- ICR auto switch, true day / night vision
- 3D DNR, WDR, HLC, BLC, smart IR, etc.
- ROI coding
- 30~50m IR night view distance
- Built-in micro SD card slot, up to 256GB
- DC12V/PoE power supply
- IP 67 ingress protection
- Support three streams
- Support remote monitoring by smart phones& tablet PCs with iOS and Android OS
- Intelligent analytics

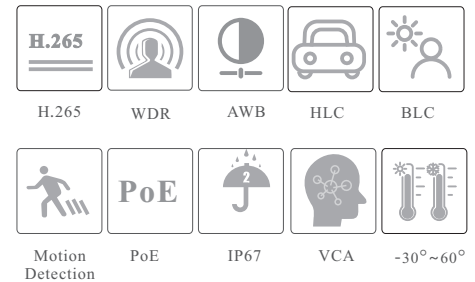

en.tvt.net.cn

For more information, please visit our website

**Shenzhen TVT DIGITAL TECHNOLOGY CO., LTD.**

Address: 23<sup>rd</sup> Floor, Block B4, Building NO.9, Shenzhen Bay Eco-Technology Park, Nanshan District, Shenzhen, Guangdong Province, P.R.China

Tel: +86-755-36995888

Web site: <http://en.tvt.net.cn>

Fax: +86-755-33104777


E-mail: [overseas@tvt.net.cn](mailto:overseas@tvt.net.cn)

### SPECIFICATIONS

Model Specifications	TD-9462S4			
<b>Camera</b>				
Image Sensor	1 / 2.7 "CMOS			
Image Size	3072 × 2048			
Electronic Shutter	1 / 1s ~ 1 / 100000s			
Iris Type	Fixed Iris			
Min. Illumination	0.007 lux @F1.6, AGC ON; 0 lux with IR			
Lens	2.8mm@F1.6, H.FoV:110.5°; V.FoV:57°; D.FoV:131°	2.8~12mm@F1.4, H.FoV: 100°~36.5°;		
	3.6mm@F1.6, H.FoV:91.5°; V.FoV: 49.5°; D.FoV:107°	V.FoV: 52°~20.5°; D.FoV: 116°~41°		
	6mm@F1.6, H.FoV:51.8°; V.FoV: 36.6°; D.FoV:65.6°			
Focus	Fixed	Motorized		
Lens Mount	M12	Ø14		
Day&Night	ICR			
Wide Dynamic Range	120dB			
BLC	Yes			
HLC	Yes			
Defog	No			
Digital NR	Yes			
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°			
<b>Image</b>				
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub/third stream: H.265+ / H.265 / H.264+ / H.264 / MJPEG			
H.265 Compression Standard	Main Profile@Leve4.1 High Tier			
Resolution	6MP ( 3072 × 2048 ), 5MP ( 2880 × 1620 ), 4MP ( 2560 × 1440 ), 3MP ( 2304 × 1296 ), 1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, 480 × 240, CIF			
Main Stream	60Hz: 6MP/5MP(1~20fps);4MP/3MP/1080P/720P(1~30fps); 50Hz: 6MP/5MP(1~20fps);4MP/3MP/1080P/720P(1~25fps)			
Sub Stream	60Hz: 720P/D1/ CIF (1~30fps);50Hz: 720P/D1/ CIF (1~25fps)			
Third Stream	60Hz: D1/480× 240/CIF (1~30fps);50Hz: D1/480× 240/CIF(1~25fps)			
Bit Rate	64 Kbps ~ 8 Mbps			
Bit Rate Type	VBR / CBR			
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser			
ROI	Each ROI to be configured separately			
<b>Interfaces</b>				
Network	RJ45			
Video Output	No			
Audio	1CH audio input; 1CH built-in MIC			
Storage	Built-in micro SD card slot, up to 256GB			
Reset	Yes			
<b>DORI Distance</b>				
Lens	Detect	Observe	Recognize	Identify
2.8mm	59.67m(195.76ft)	23.87m(78.31ft)	11.93m(39.14ft)	5.97m(19.58ft)
3.6mm	71.10m(233.26ft)	28.44m(93.30ft)	14.22m(46.65ft)	7.11m(23.32ft)
6mm	97.97m(321.42ft)	39.19m(128.57ft)	19.59m(62.27ft)	9.80m(32.15ft)
2.8~12mm(W)	67.93m(222.86ft)	27.17m(89.14ft)	13.59m(44.58ft)	6.79m(22.27ft)
2.8~12mm(T)	183.75m(602.85ft)	73.50m(241.14ft)	36.75m(120.57ft)	18.37m(60.26ft)
<b>Functions</b>				
Remote Monitoring	Web browser /TVT NVR/NVMS2.X/Mobile APP			
Web Browser	IE (plug-in required)/Google Chrome/Edge/Firefox/Safari			
Online Connection	Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission			
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, RTMP, HTTP, HTTPS, QoS			
Interface Protocol	ONVIF			
Storage	Network remote storage; micro SD card storage			
Smart Alarm	Motion detection, SD card full, SD card error			

Smart Event	Video Exception (scene change, video blur and video cast detection), line crossing detection, region intrusion detection, abandoned/missing object detection
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock, corridor pattern
PoE	Yes
IR Distance	30 ~ 50 m
Ingress Protection	IP67
<b>Others</b>	
Power Supply	DC12V/PoE
Power Consumption	< 8.5W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F); Humidity: less than 95 % (non-condensing)
Storage Environment	- 30 °C ~ 65 °C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Dimensions ( mm )	217.8 × 80.5 × 80.3
Weight ( net )	Approx. 0.66KG
Installation	Ceiling mounting; Wall mounting
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU), directive 94/62/EC and REACH(EC1907/2006)

### DIMENSIONS

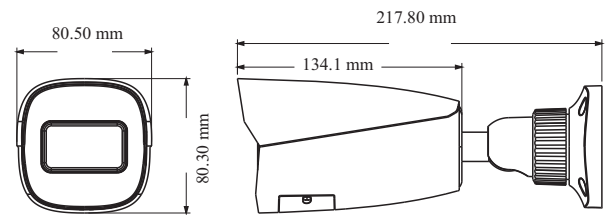

### AVAILABLE ACCESSORIES



### AVAILABLE MODEL

Available Model	TD-9462S4(D/PE/AR3)	Fixed lens
	TD-9462S4(D/AZ/PE/AR3)	Motorized zoom lens