# **Network Recorder**

TVT-32CHNVR-P

32 Channel NVR with 6TB Hard Drive



- User Friendly GUI
- Supplied with 6TB Hard Drive
- Free App For Apple & Android
- 2 Year Return to Base Warranty




#### **SPECIFICATIONS**

Model		TVT-32CHNVR-P
System	os	Embedded Linux
Video	Network Input	32 CH IPC input
	Incoming Bandwidth	256Mbps
	Outgoing Bandwidth	256Mbps
	Network Input Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/ 720P/960H/D1/CIF
	Output	HDMI × 1 : 3840×2160@60fps/3840×2160@30fps/ 1920×1080/1280×1024/1024×768 VGA × 1 : 1920×1080/1280×1024/1024×768
	Compression	Standard H.265/H.264
Audio	Network Input	32 CH IPC audio input
	2-way Audio	RCA×1
	Local Output	RCA×1
	Compression	G.711(U/A)
	Record Stream	Dual stream recording
Record	Resolution	8MP/6MP/5MP/4MP/3MP/1080P/1280 × 1024/960P/ 720P/960H/D1/CIF
	Frame Rate	NTSC: 30fps; PAL:25fps
	Mode	Manual, timer, motion, sensor, smart events
Decoding Capability	Live View/ Playback	1CH 8MP/4CH 5MP/9CH 720P/16CH 720P
	Simultaneous Playback	Max 16 CH
Playback	Search	Time slice / time / event / tag search
, laybaok	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
	Mode	Manual, sensor, motion, exception, smart events
	Input	16 CH local alarm input; supports IPC alarm input
Alarm	Output	4 CH
	Triggering	Record, snapshot, buzzer, preset, e-mail, etc.
	Channel	32 CH
	Face Picture	32 libraries
	Database	5000 Face Pictures
	Computing Capability	180 pictures / minute
Face	Face Picture Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Picture Adding	Add face pictures through APP, WEB and external import
	External face picture enrollment	Resolution : $128 \times 128 \sim 1920 \times 1080$ Size : $\leq 70$ KB Format : jpg&jpeg
	Face Picture Comparison	Supports allow list and block list alarm
	Face Track	Yes
	Map of Face Track	Reolution: 2560 x 1920 Size: ≤ 512KB Format: jpg&jpeg
	Statistic Graph of Face Information	Bar graph
	Statistic Mode of Face Information	Statistics by day, week, month, quarter as well as customized time period

PoE	PoE Port	RJ45 × 16
	Standard	IEEE802.3af
	Output Power	≤ 150W
Network	Interface	RJ45 10 / 100 / 1000 Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPs, 802.1x
Mobile Device	os	iOS, Andriod
Storage	HDD Interface	SATA × 4, max 8T per HDD
Backup	Local Backup	U disk, USB mobile HDD
Баскир	Network Backup	Yes
Port	RS485	Yes (full-duplex), connect to PTZ or keyboard
	USB	USB 2.0 × 1 , USB 3.0 × 1
	Remote Controller	Optional
Others	Power Supply	ATX 292W
	Consumption	≤ 15W ( without HDD and PoE power supply )
	Dimensions (mm)	440 × 390 × 70 ( W × D × H )
	Working Environment	-10 ~ 50 °C , 10% ~ 90% humidity
Storage  Backup  Port	Local Backup  Network Backup  RS485  USB  Remote Controller  Power Supply  Consumption  Dimensions (mm)  Working	U disk, USB mobile HDD  Yes  Yes (full-duplex), connect to PTZ or keyboard  USB 2.0 × 1 , USB 3.0 × 1  Optional  ATX 292W  ≤ 15W ( without HDD and PoE power supply )  440 × 390 × 70 ( W × D × H )

#### Features

- Supports 32 CH 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280 × 1024 / 960P / 720P / 960H / D1 / CIF IP video input
- Standard H.265 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor / smart events
- Playback : 16 CH simultaneous playback
- Search : time slice, time, event, tag search and smart search
- Supports face detection and comparison
- Supports multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video tampering, etc.
- Supports POS information overlay on live view and playback
- Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web Client or CMS: preview, playback, backup, PTZ and configuration
- 16 PoE network ports; PoE power supply supported
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Supports PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Supports NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Andriod OS

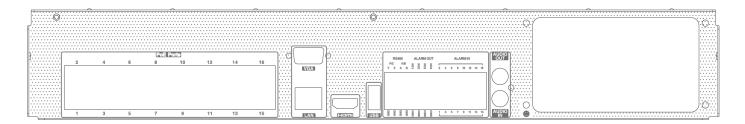

## Smart Phone App



### Search/Playback




Single Camera View



**General Settings** 



**Function Panel** 

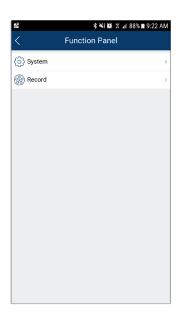

Select Camera



**Device Settings** 



