

Network Camera

TVT-B3610SPOE

5.0MP IP Starlight Bullet Camera - 3.6 - 10mm

Lens


TVT[®]

- True Day / Night Image
- Power Over Ethernet
- 30-50m Infrared Range
- IP66 For New Zealand Conditions
- 2 Year Return to Base Warranty



HDCCTV


5 MP Network IR Water-proof Bullet Camera

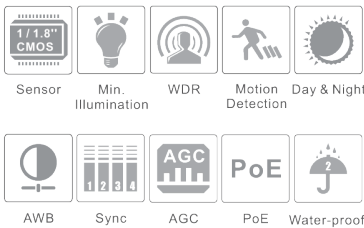

Features

- H.265 main profile video compression technology, high compression ratio, stable stream control
- 5MP (2592 × 1944) full real time coding
- Max.resolution: 2592 × 1944
- ICR auto switch, true day / night
- 30 ~ 50m IR night view distance
- 3D DNR, digital WDR
- Support 8 ROI coding
- One gigabit ethernet network port, 10M / 100M / 1000M self-adaptive
- Support SD card local storage, up to 128GB
- Support CVBS local video, two-way audio and PoE power supply
- Support smart phone, iPad, remote monitoring
- Support P2P
- Support three streams

Dimensions

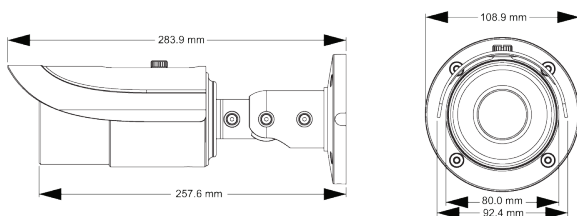

Available Accessories



Specifications

Specifications	Model	TVT-B3610SPOE
Camera		
Image Sensor		1 / 1.8 "CMOS
Image Size		2592 × 1944
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Min. Illumination		0.01 lux @F1.2, AGC ON; 0 lux with IR
Lens		3.6 ~ 10 mm @F1.4, angle of view: 83.7°~36.7°
Lens Mount		Φ14
Day & Night		ICR
Wide Dynamic Range		Digital WDR
Digital NR		2D / 3D DNR
Angle Adjustment		Any angle
Image		
Video Compression		H.265 / H.264 / MJPEG
H.265 Compression Standard		Main Profile @Leve4.1 High Tier
Resolution		5MP (2592 × 1944), 2K (2560 × 1440), 1080P (1920 × 1080), 720P (1280 × 720), D1, CIF, 480 × 240
Main Stream		60Hz : 5MP (1~30fps) / 2K (1~30fps) / 1080P (1~30fps) / 720P (1~30fps) 50Hz : 5MP (1~25fps) / 2K (1~25fps) / 1080P (1~25fps) / 720P (1~25fps)
Bit Rate		64 Kbps ~ 10 Mbps
Encode Mode		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR,etc. adjustable through client software or web browser
Audio Compression		G.711A / U
ROI		Support independent ROI configuration of each stream
Interfaces		
Network		Gigabit ethernet network port (RJ45 × 1), 10M / 100M / 1000M self-adaptive
Audio		MIC IN × 1, MIC OUT × 1
Video Output		CVBS video output (BNC × 1)
Storage Card		Support SD card, up to 128GB
RS485		Yes
Alarm Input		1 CH
Alarm Output		1 CH
Functions		
Remote Monitoring		IE browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol		ONVIF, GB-T / 28181-2011
Storage		SD card local storage, network remote storage
Smart Alarm		Motion alarm, sensor alarm
PTZ		RS485 × 1
PoE		Yes
IR Distance		30 ~ 50 m
Water-proof		IP66
Others		
Power Supply		DC 12V / PoE
Power Consumption		< 3W
IR Consumption ON		< 7.5W
Operating Environment		- 20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions (mm)		Φ109 × 284
Weight (net)		1132g
Installation		Wall mounting, pendent mounting