

HD Camera

TVT-D2812TVI

2.0MP HD Dome Camera - 2.8 - 12mm Lens

TVT®

- Vandal Dome
- 1080P Real Time Image
- 20 ~ 30m Infrared Range
- IP66 For New Zealand Conditions
- 2 Year Return to Base Warranty




Compact Design

HDCCTV
Over Coax

SPECIFICATIONS

Model	TD-7525AE2L
Specifications	
Camera	
Image Sensor	1 / 2.9 "CMOS
Resolution	2MP
Image Size	1920 x 1080
Video Output	AHD / TVI / CVI / CVBS
Image System	PAL / NTSC
Electronic Shutter	Auto; 1 / 50s ~ 1 / 100000s (PAL); 1 / 60s ~ 1 / 100000s (NTSC)
IR Distance	20 ~ 30 m
Frame Rate	30fps(60Hz); 25fps (50Hz)
Min. Illumination	0 lux (IR ON)
Lens	2.8~12 mm
Lens Mount	D14
S / N Ratio	≥52dB (AGC OFF)
Ingress Protection	IP 66
Functions	
Function Control	OSD (COC Control)
Day & Night	ICR
Digital WDR	Yes
Digital NR	Yes
AGC	Yes
Auto White Balance	Yes
BLC	Yes
Defog	No
HLC	No
Sharpness	Yes
Image Setting	Yes
Defect Correction	Auto
Language	Chinese and English
Angle Adjustment	Pan: 0°~360°; Tilt: 0°~90°; Rotation: 0°~360°
Others	
Power Supply	DC12V (± 10%)
Power Consumption	IR OFF : < 1W; IR ON : < 4W
Working Environment	- 30 °C ~ 50 °C, 10 % ~ 90 % (relative humidity)
Dimensions (mm)	Φ130.3 x 110
Weight (net)	Approx. 0.65KG

DIMENSIONS

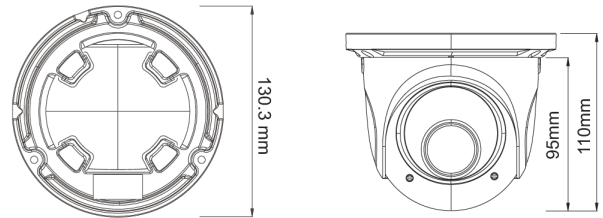

AVAILABLE ACCESSORIES

