

RX-2 MF349

Multi-function Receiver

303, 433 & 915MHz



Features

- Two Channel Receiver
- Store up to 20 Radio Codes
- Multi-frequency 303, 433 & MHz
- Perfect for Gate/Garage Door Automation
- Momentary or Latching

RX-2 MF349 Specifications

RX-2 MF349




Specifications:	
Input Voltage	12 or 24V AC/DC
Frequency	303, 433, 915Mhz
Radio Codes	Up to 20
Dip-switch Frequency Selector	✓
Latching Function	✓
Momentary Function	✓
Relays	2 x Clean Contact Relays
Dimensions	L100 x W65 x D20mm

Dimensions




Top View

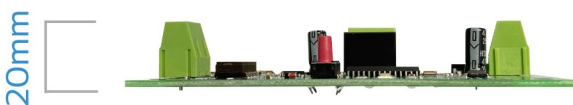

Side View

Schematic

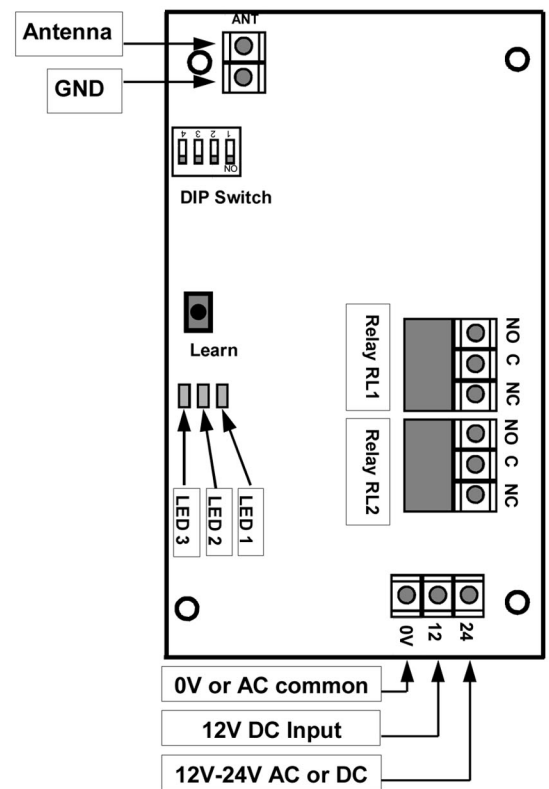

Proudly Supplied by AAP
 344B Rosedale Road, Albany, 0632
 Auckland, New Zealand
www.aap.co.nz