

Rechargeable Battery

DM12-40



Multi Purpose Sealed Lead Acid Battery




Arrowhead
Alarm Products



Product Dimensions



Terminal Type: T12

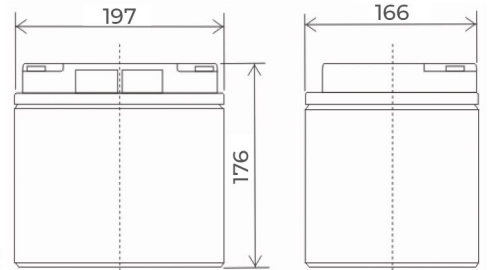

1 Year Warranty

Constant Current Discharge * Amperes @ 25°C

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	99.06	75.62	65.32	55.03	47.44	41.91	39.08	36.25	33.82	31.89	30.27	16.48	11.67	9.70	7.93	4.24	2.06
1.65	94.06	71.80	62.37	52.93	46.19	40.80	38.11	35.42	33.13	31.34	29.85	16.16	11.45	9.50	7.75	4.22	2.05
1.70	90.18	68.84	59.90	50.97	44.73	39.45	36.87	34.28	32.10	30.41	29.03	15.62	11.19	9.28	7.57	4.18	2.05
1.75	86.02	65.66	57.23	48.80	43.07	37.96	35.55	33.14	31.13	29.62	28.41	15.19	10.94	9.07	7.41	4.14	2.10
1.80	81.58	62.27	54.42	46.56	41.40	36.43	34.17	31.90	30.03	28.66	27.59	14.64	10.68	8.85	7.22	4.03	2.09

Constant Power Discharge * Watts/cell @ 25°C

V/cell	10min	15min	20min	25min	30min	35min	40min	45min	50min	55min	1hr	2hr	3hr	4hr	5hr	10hr	20hr
1.60	172.03	131.32	115.57	99.82	87.17	78.49	72.91	67.33	62.25	58.27	54.59	29.54	21.57	18.33	15.10	8.46	4.46
1.65	165.93	126.66	111.70	96.74	84.88	76.41	71.04	65.67	60.80	57.03	53.57	28.92	21.36	18.13	14.89	8.38	4.46
1.70	159.55	121.79	107.55	93.31	82.17	73.98	68.89	63.80	59.22	55.73	52.54	28.21	20.95	17.81	14.67	8.21	4.40
1.75	152.61	116.50	103.05	89.60	79.26	71.35	66.54	61.73	57.42	54.21	51.30	27.28	20.34	17.37	14.40	8.15	4.32
1.80	145.12	110.78	98.20	85.62	76.14	68.51	63.98	59.45	55.42	52.49	49.86	26.29	19.80	16.94	14.08	8.07	4.28

* The mentioned data is derived from a sample test result & for reference only*



Graphs

